


Three different mounting versions.

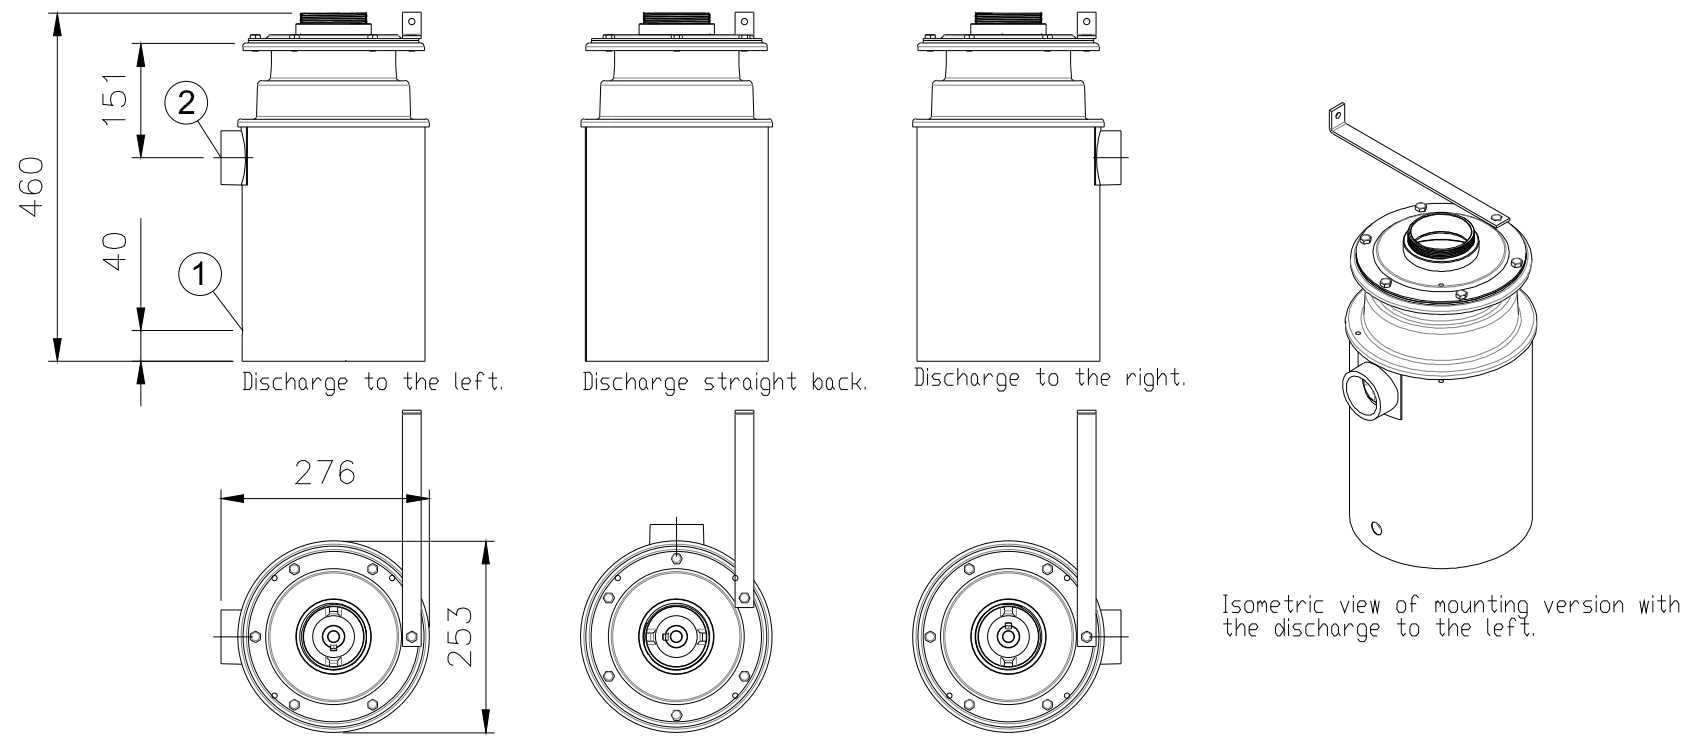


① Electrical connection: Semi-fixed, cable length 2 m, cable gland M20

② Disposer outlet: 2" BSP female

Code	Electric supply	P/kW	I/A	Fuse/A
4000515MM	3PE AC 440V 60Hz	1,1	2,4	10
4000515MO	3PE AC 480V 60Hz	1,1	2,4	10
4000515MK	3PE AC 400V 50Hz	1,1	2,6	10

Installation principle Side view

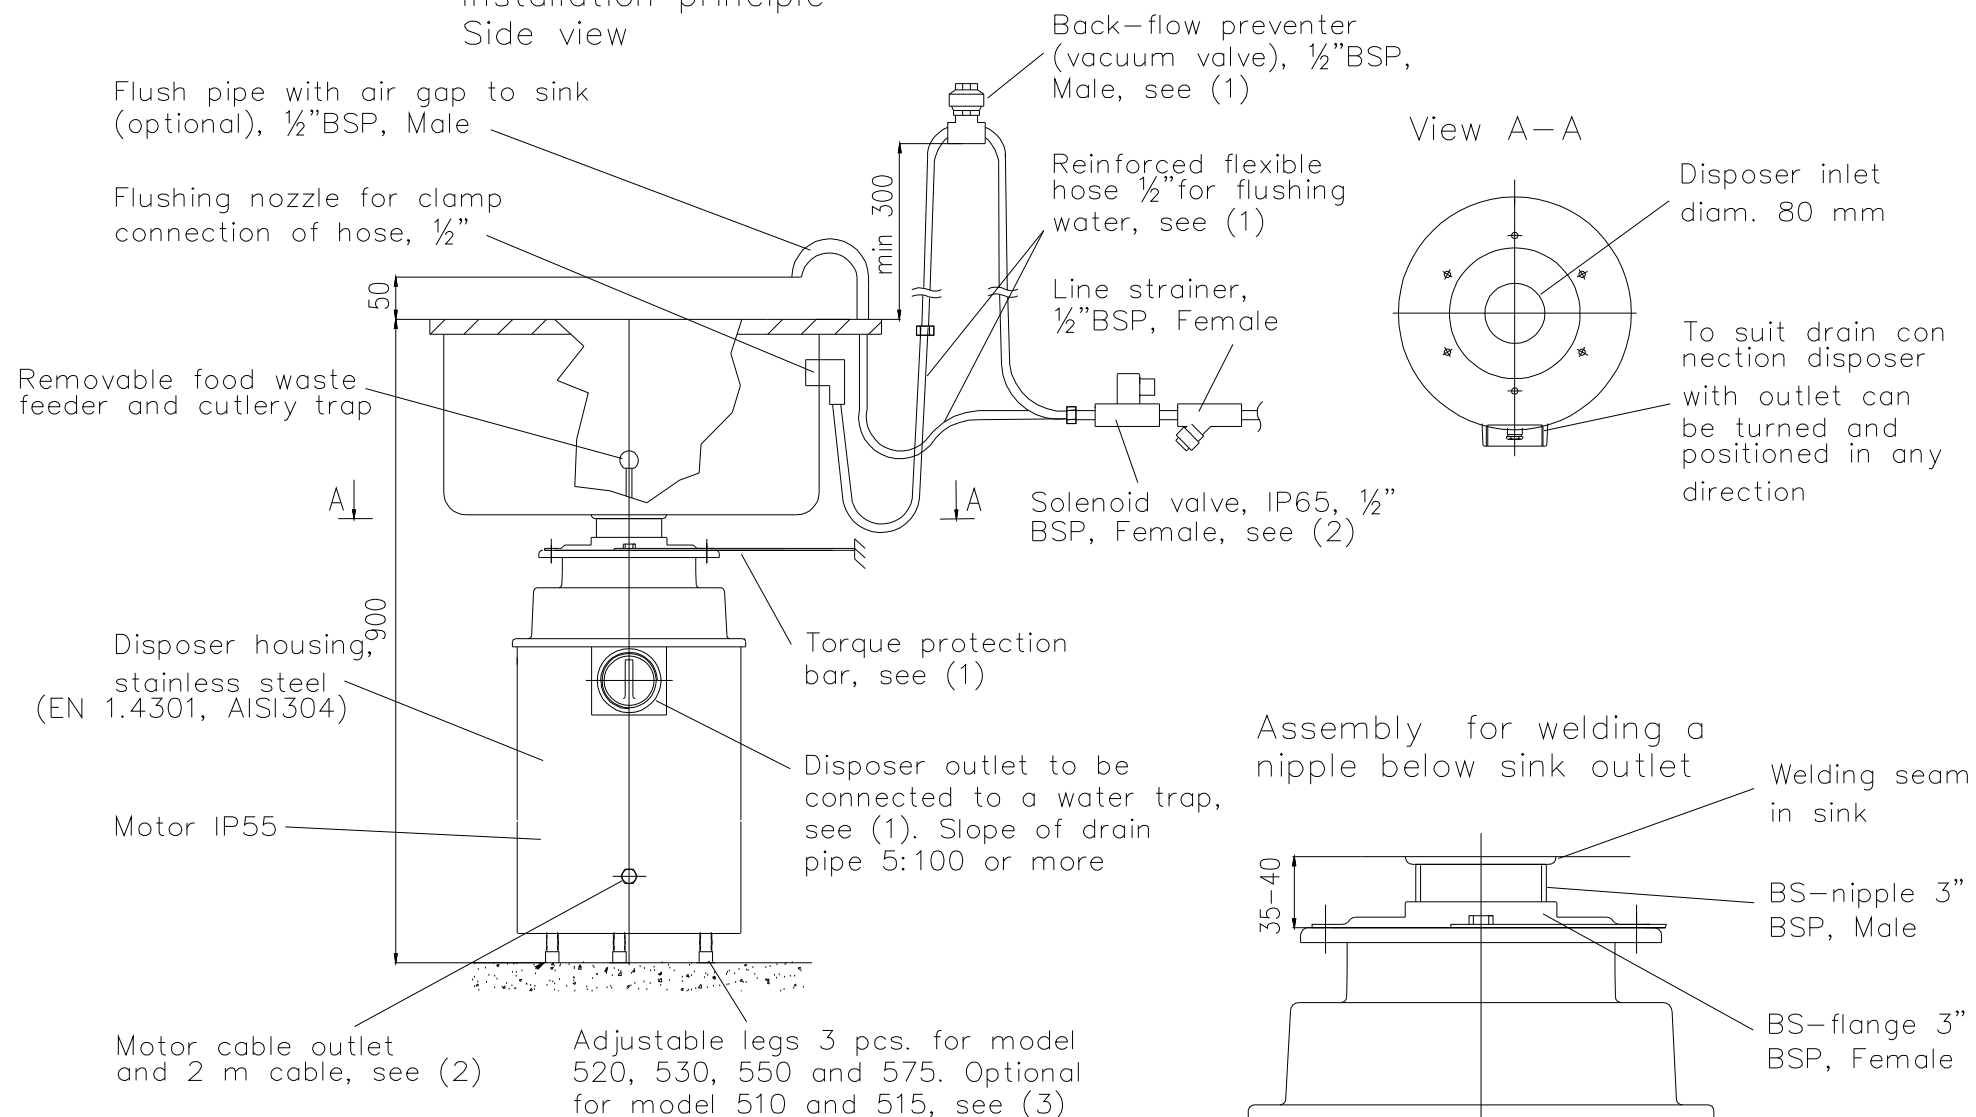

- (1) Installation material needed but not incl. in standard delivery are: electrical connection terminal / main switch, flexible hose 1/2", backflow preventer, water trap and torque protector. Can be ordered from DISPERATOR.
- (2) For connection to start & stop controller (IP55, incl. overload protector) placed on wall / bulkhead. Controller to be connected to terminal / main switch, see (1).
- (3) 3-ph standard without legs. Legs available as option –and then with same measurements b), c) and g) as model 520. Models 510, 515 1-ph have same measurements b), c) and g) as model 520.
- (4) Short version (b = 510 mm and c = 522–593 mm) and longer version (b = 640 mm and c = 665–730 mm) available as option.
- (5) Installation, operation and service instructions are together with this product leaflet included in delivery.

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhteet: Scale:	1: 10 A3	Suun. Design:	www.metos.com /
Tori./Tilauksen. No./order nr.		Pvm. Date 11.04.2017	
Nimitys Name		Waste disposer Disperator 515A-BS	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no.
		Vers.ind.	Lehti Page