



Three different mounting versions.

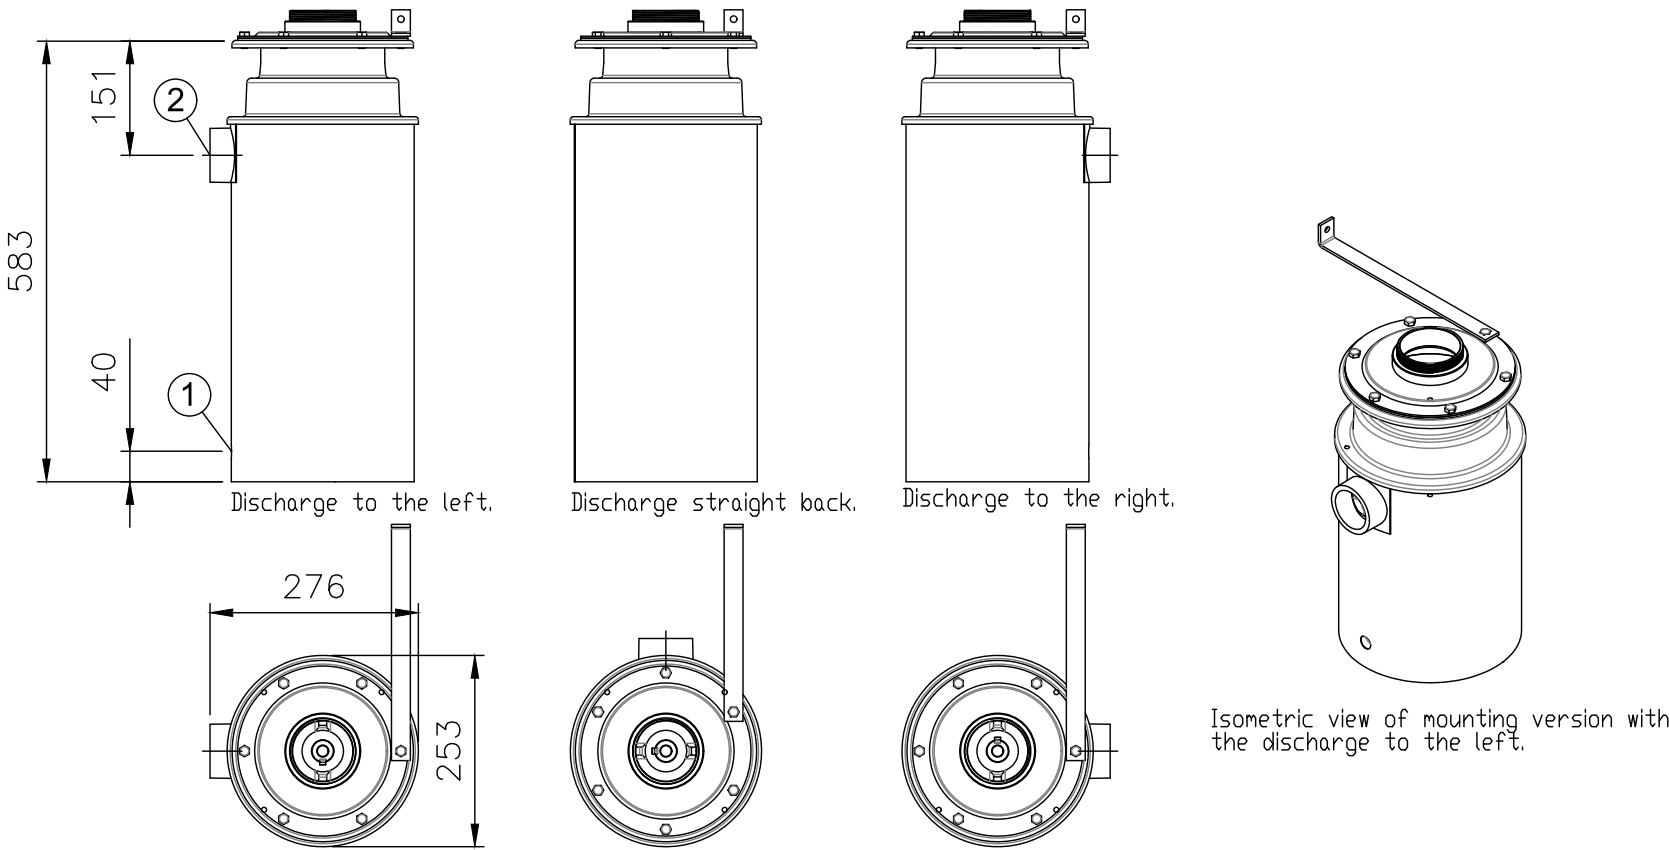

- ① Electrical connection: Semifixed, cable length 2m
- ② Disposer outlet: G2" BSPP, internal thread

Code	Electric supply	P/kW	Fuse/A
4000520MM	3PE AC 440V 60Hz	1,5	10
4000520MO	3PE AC 480V 60Hz	1,5	10
4000520MK	3PE AC 400V 50Hz	1,5	10

Installation principle side view

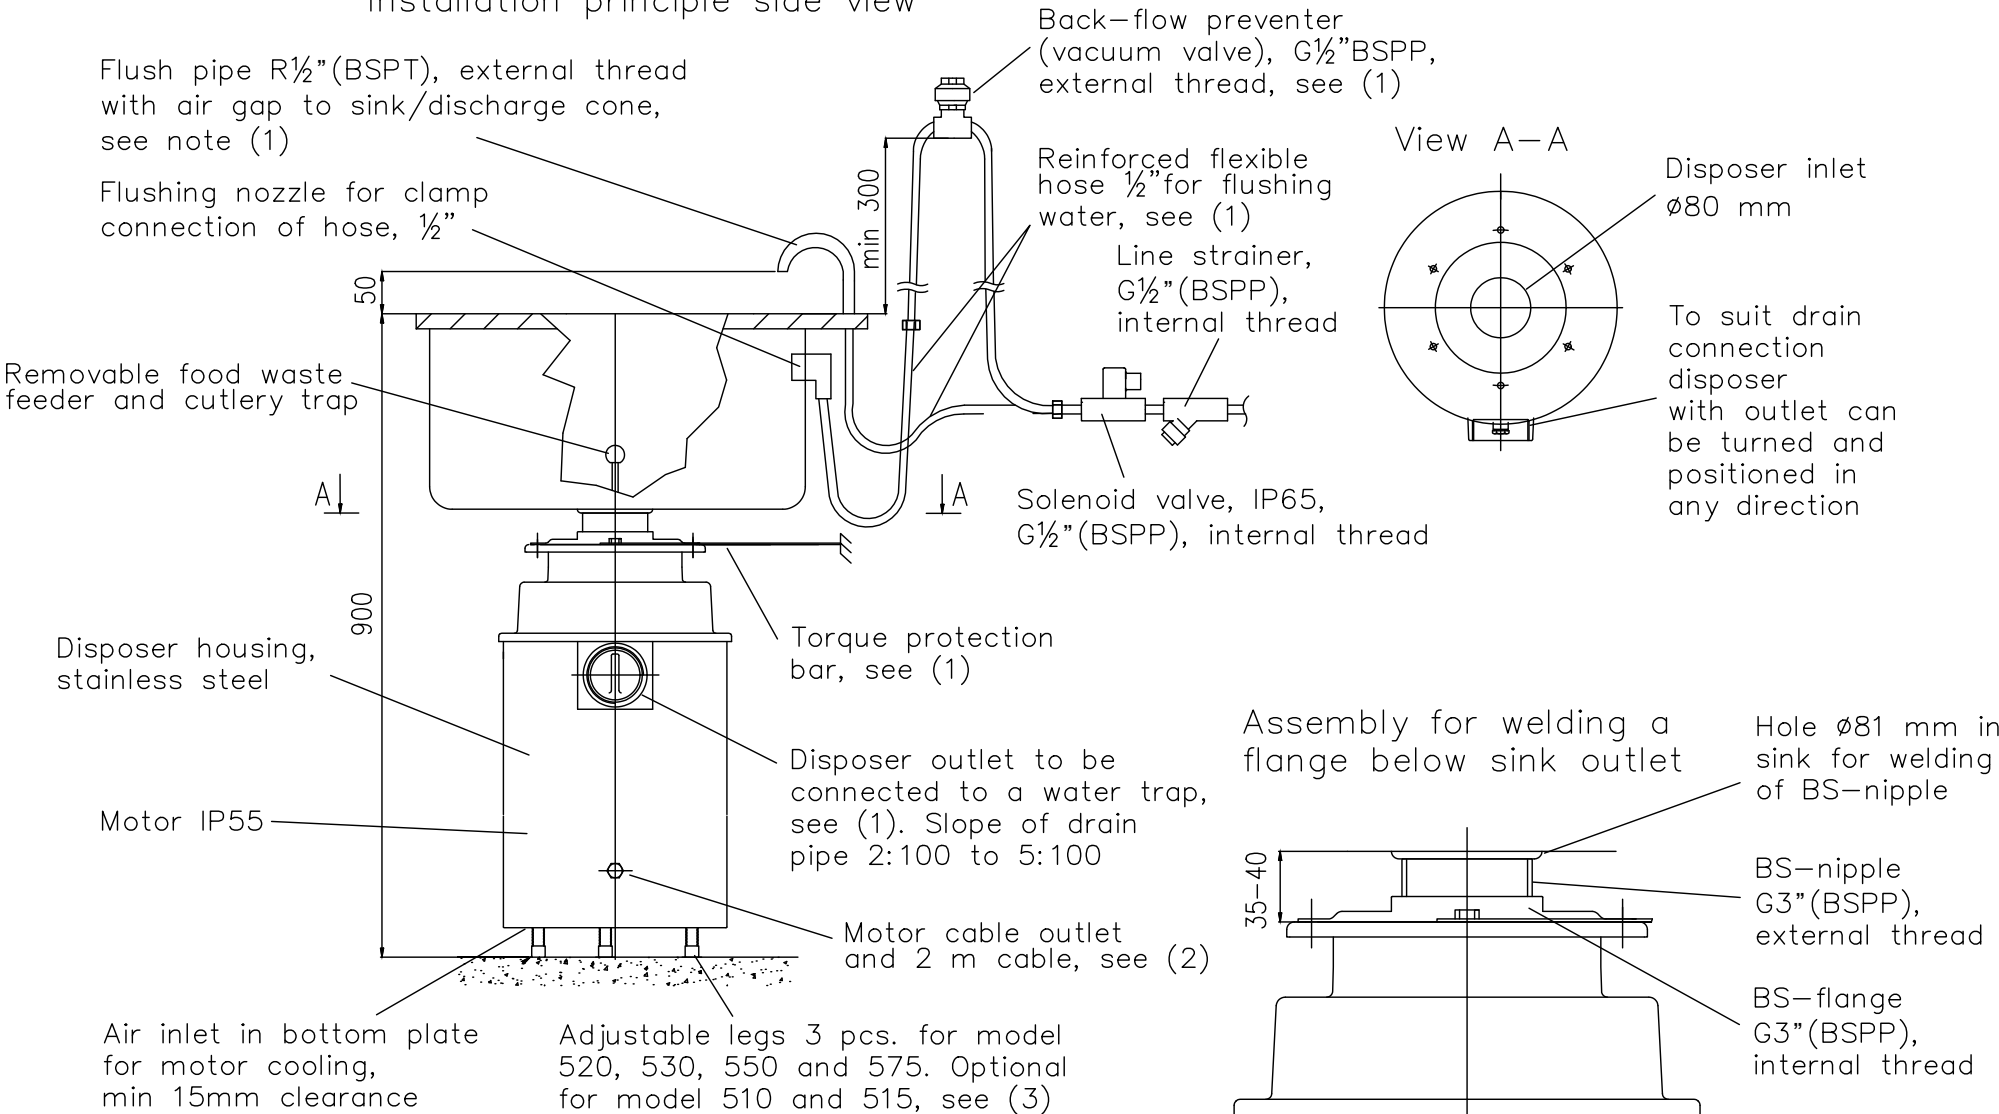

- (1) Installation material needed but not incl. in standard delivery are:
- main electrical safety switch placed on wall/bulkhead for incoming electricity,
 - hose with protective steel-covered stocking (minimum inner Ø9mm) for cold flush water,
 - vacuum valve (marine installation),
 - water trap for connection to disposer outlet,
 - torque protection bar, for fixing disposer to wall/bulkhead.
- Can be ordered from DISPERATOR.
- (2) For connection to start/stop unit including contactor and overload protector (IP66) placed on wall/bulk head. Start/stop unit to be connected to main electrical safety switch, see (1), but not to earth leakage circuit breaker.
- (3) 3-ph. unit without legs as standard. Legs available as option.