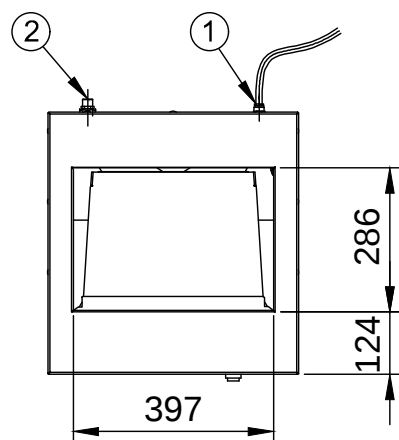
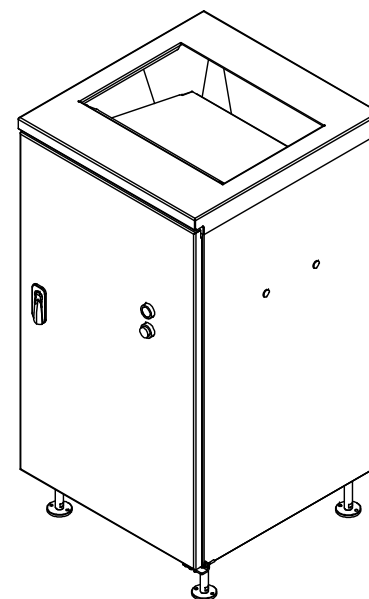
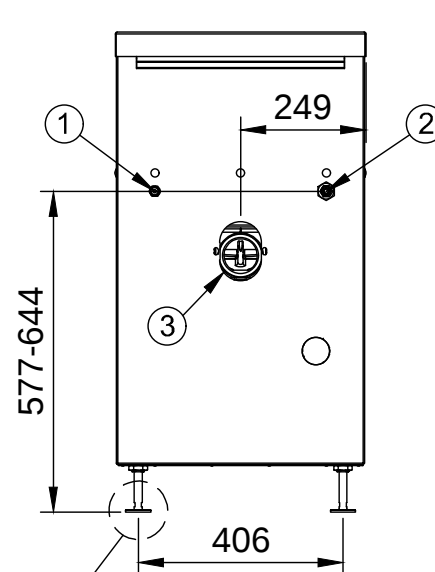
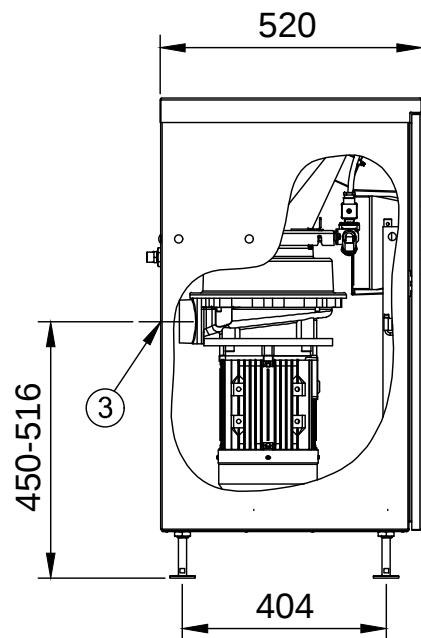
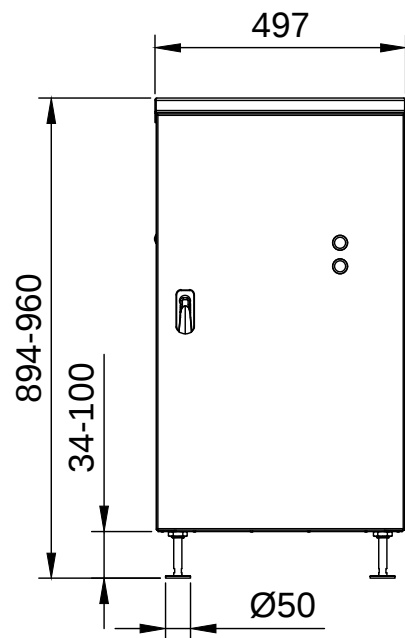


- ① Electrical connection: Semifixed, cable length 2m, cable gland M20
- ② Water connection: R $\frac{1}{2}$ " (BSPT) , external thread
- ③ Drainage outlet: G2 $\frac{1}{2}$ " (BSPP) , internal thread

Code	Electric supply	P/kW	Fuse/A
4000551MK	3PE AC 400V 50Hz	4	D16
4000551MM	3PE AC 440V 60Hz	4	D16
4000551MO	3PE AC 480V 60Hz	4	D16

Vers.	Muutos:	Pvm.	Suun.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suun.		Kaupalliset asiat:	Työmaa-asiat:
Suhde: www.metos.com		Proj.no	Tarj./lausnro.
1: 15 A4		Pvm. 11.11.2024	
Nimitys		Waste disposer Disperator 550A-MC	
metos			
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Piiir.no Lehti	