



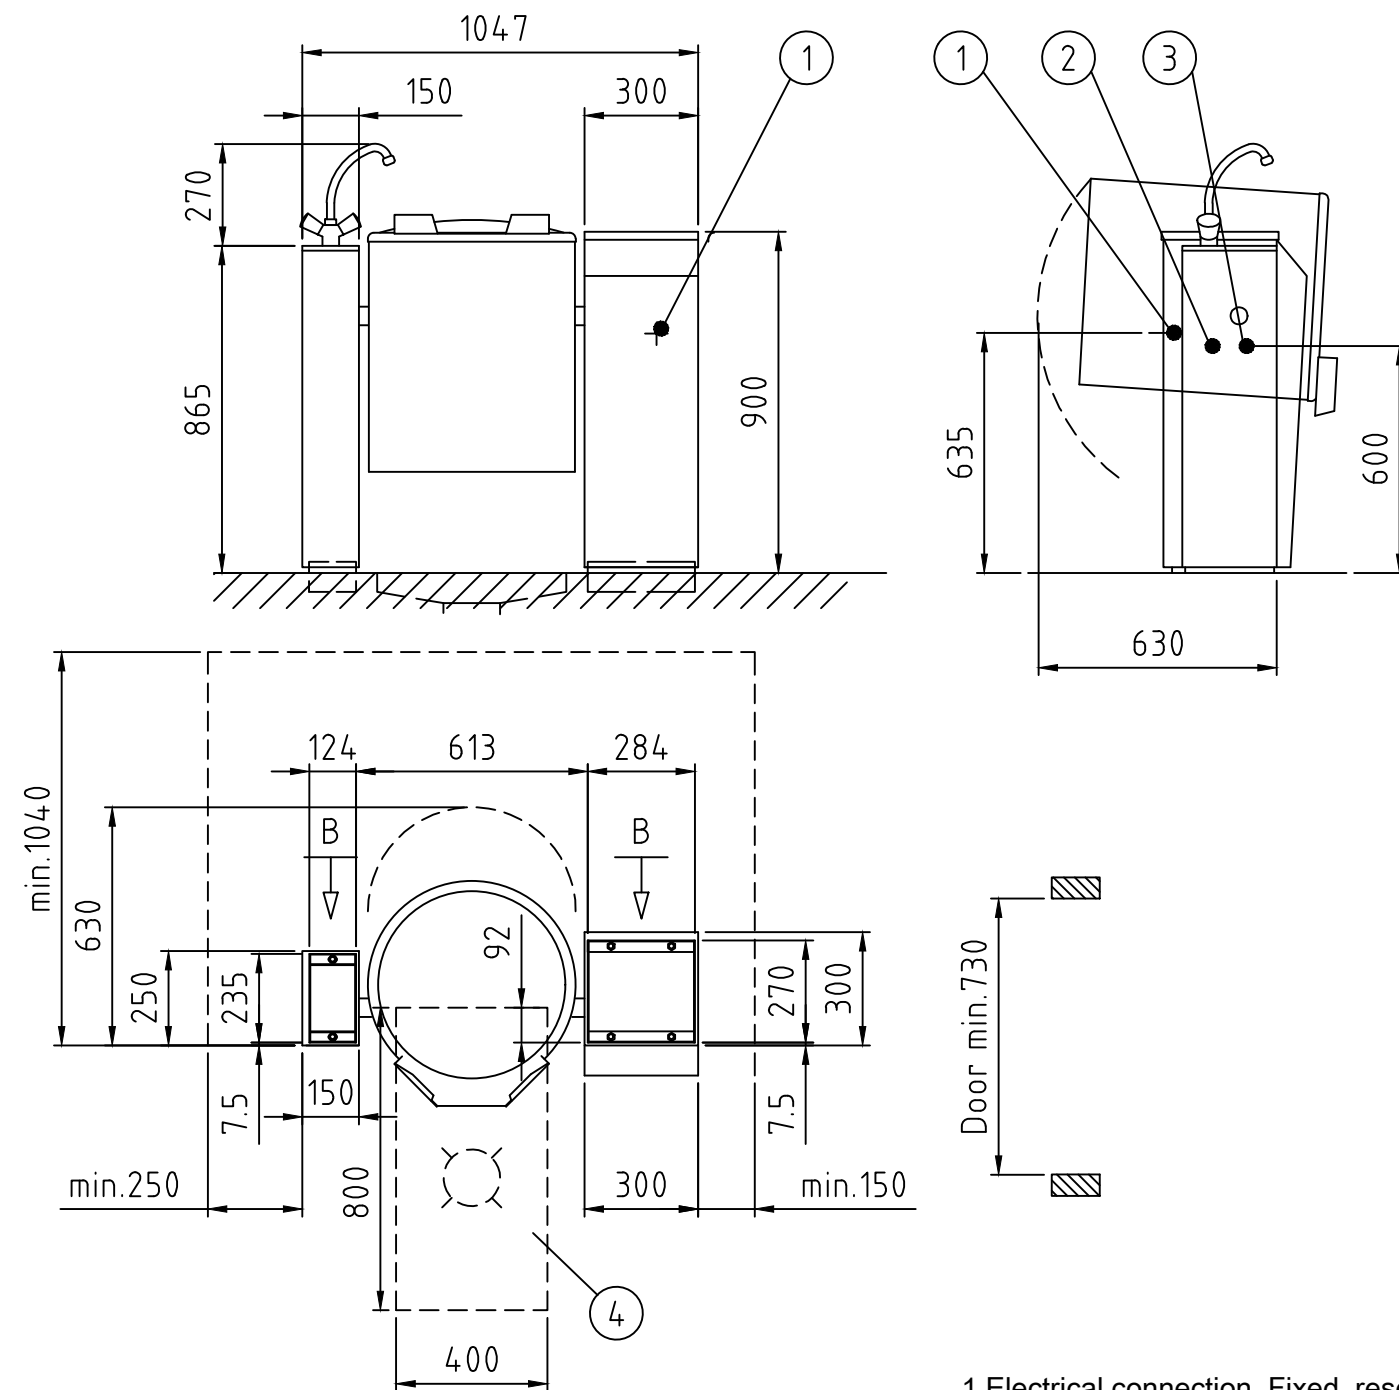


- 1 Electrical connection, Fixed, reserve about 0,8m free cable above the floor.
 2 Cold water connection G3/8" female
 3 Hot water connection G3/8" female
 4 Recommended floor drain (not included in delivery)

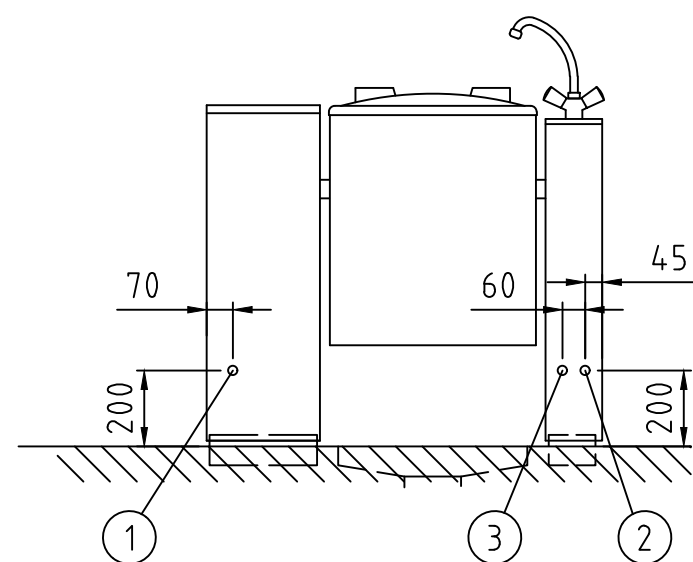

B - B

Alternative routing of electricity and water trough
 Ø25 mm holes in the rear plates of the pillars.

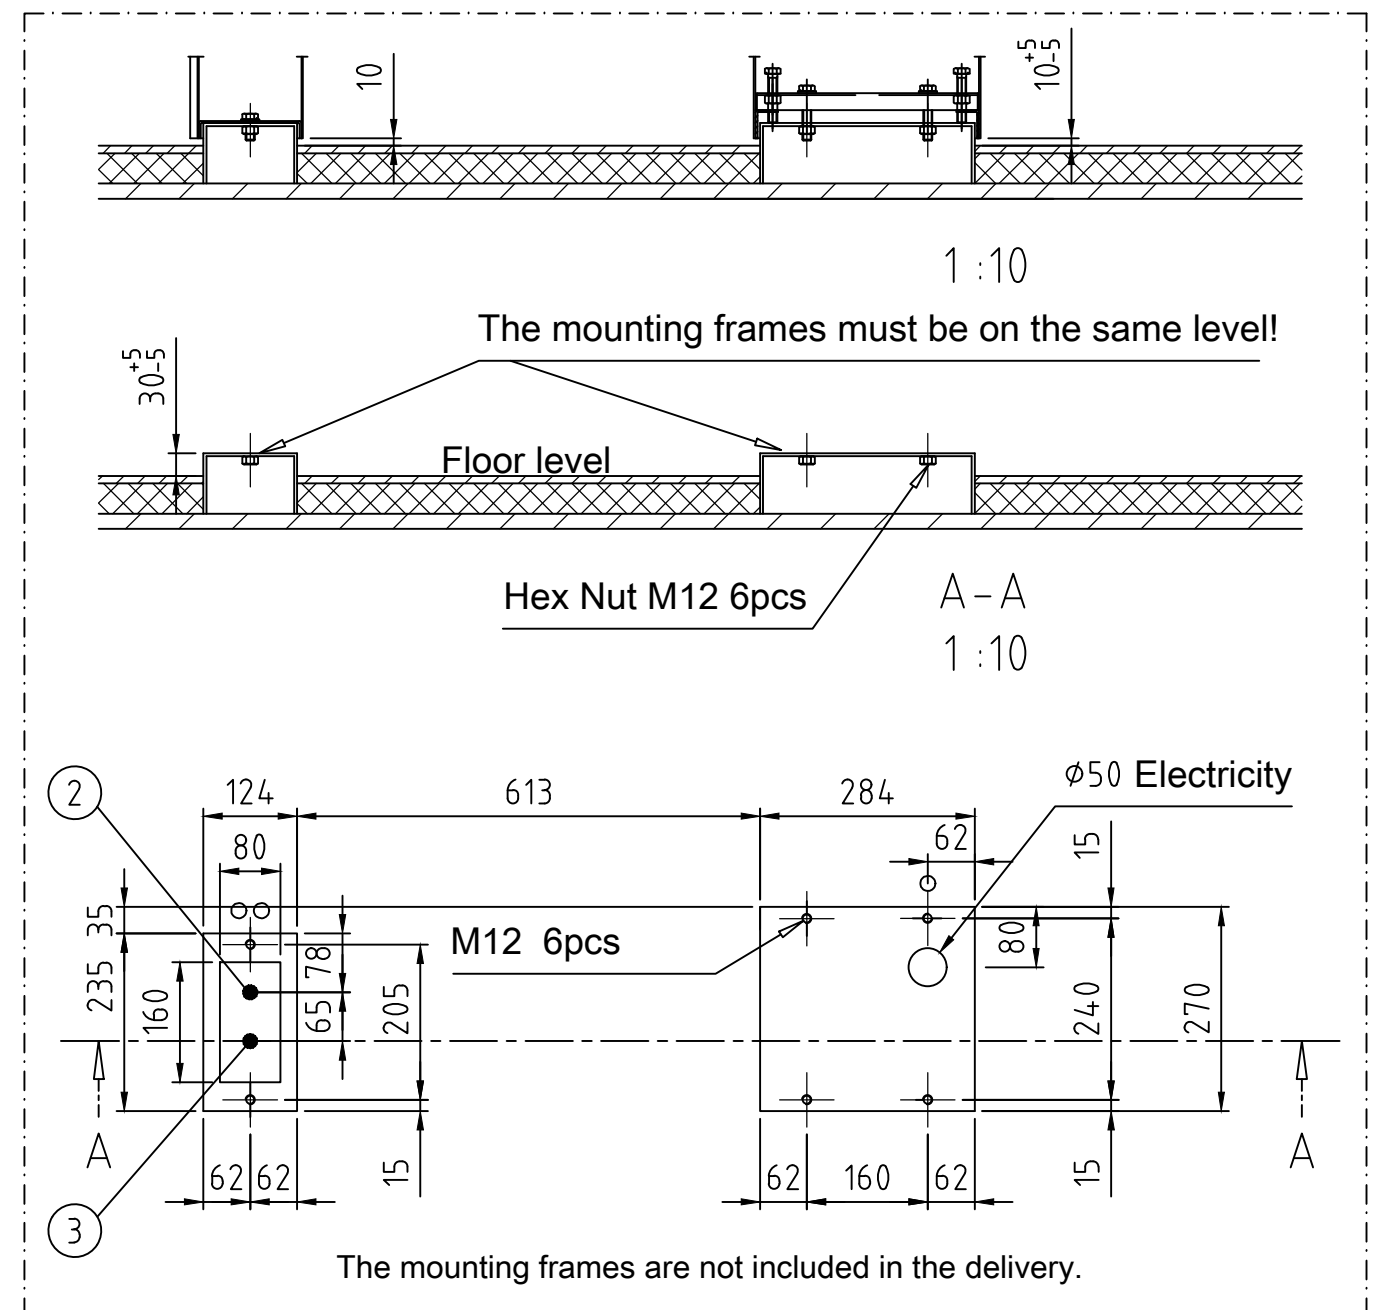

Code	Electric supply	P/kW	I/A	Fuse/A
4215817	3PE AC 440V 60Hz	10,5	14	16
4215819	3PE AC 400V 50Hz	10,5	15	16
4215817MO	3PE AC 480V 60Hz	13,1	16	20

Vers.	Muutos:	Pvm.	Suun.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suun.	Kaupalliset asiat:	Työmaa-asiat:	
Suhde:	Proj.no	Tarj./tilausno.	Pvm.
1: 20 A3		12.11.2019	
metos		Cooking kettle Metos Viking 60E SW	
Metos Oy Ab FI-04220 KERAVALA Tel: 0204 39 13 Fax: 0204 39 4432		Piir.no	Lehti