



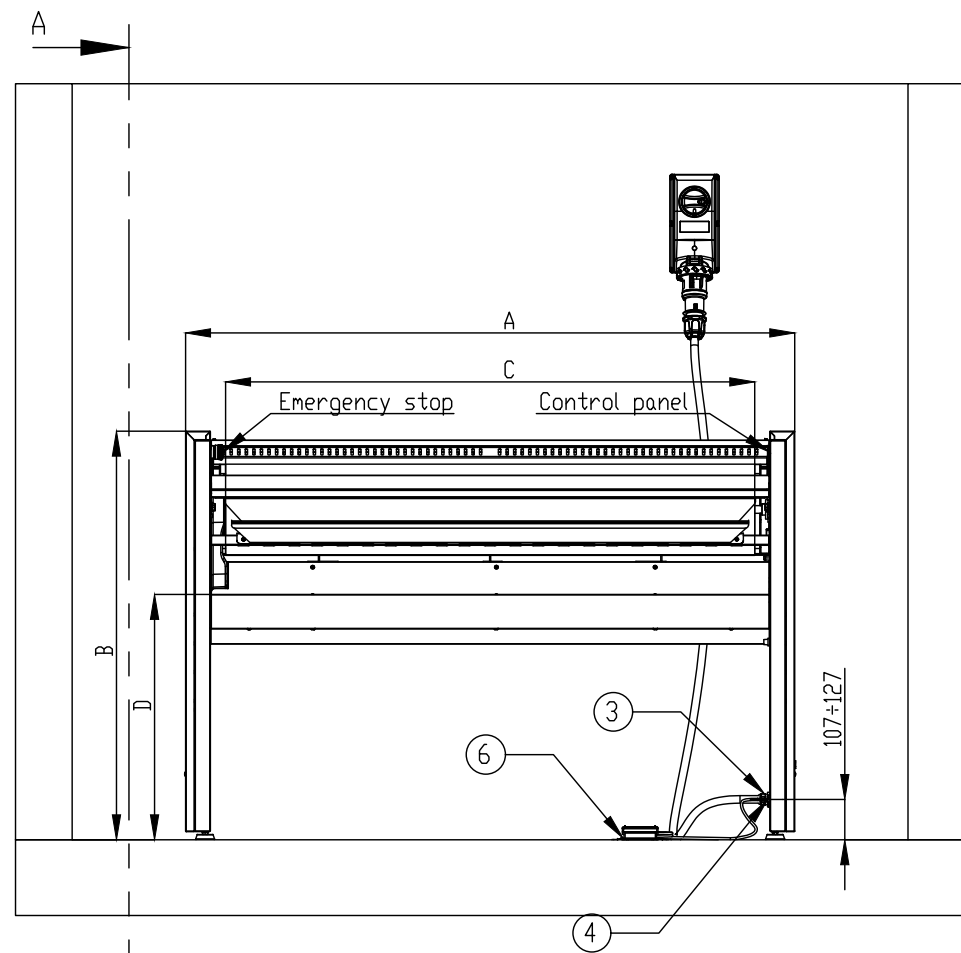

SECTION A-A




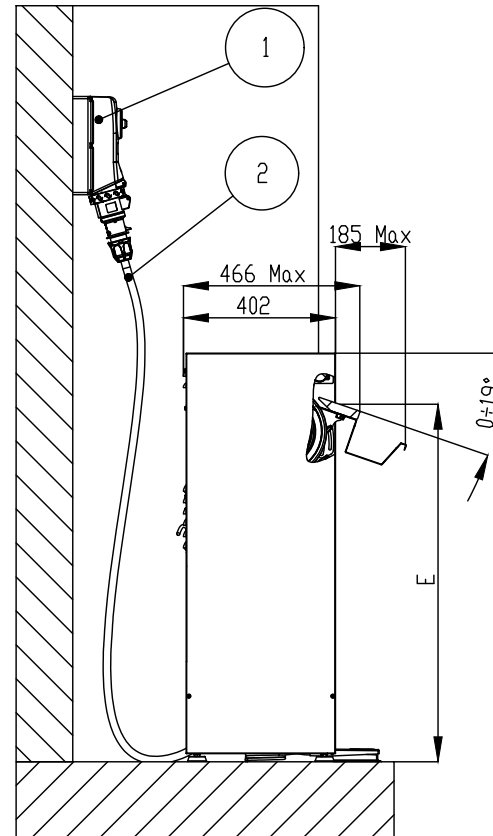


Legend	Pos.
Socket with interlock switch protected by: - Residual current circuit breaker x TT electrical distr. system - Fuses x TN-S electrical distribution system (Not included)	1
Supply cord (Not included)	2
Power supply inlet	3
Equipotential earth terminal	4
Fixing holes (If required)	5
Footpeg fixing bracket and fixing holes (if required)	6

Pos.	GI 1218	GI 1418
A [mm]	1412	1612
B [mm]	1080-1100	
c [mm]	1190	1390
D [mm]	648 + 668	648 + 668
E [mm]	945+965 (19°) 995+1015 (0°)	945+965 (19°) 995+1015 (0°)
H [mm] (functioning/maintenance -	50 / 600	
I [mm] (functioning/maintenance -	50 / 600	
L [mm]	1308	1508

IP PROTECTION	IP X0
---------------	-------

Model	Code	Electric supply	P/kW	Fuse/A
GI1218 E VT + TA	4160183MM	3PE AC 440V 60Hz	4,68	8
	4160183MK	3PE AC 400V 50Hz	4,68	8
GI1418 E VT + TA	4160184MM	3PE AC 440V 60Hz	5,4	10
	4160184MK	3PE AC 400V 50Hz	5,4	10

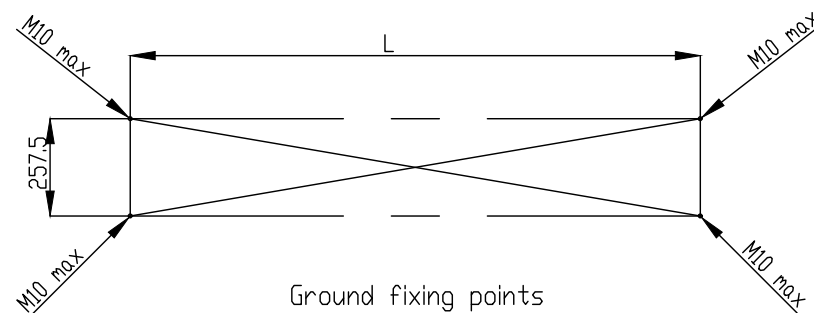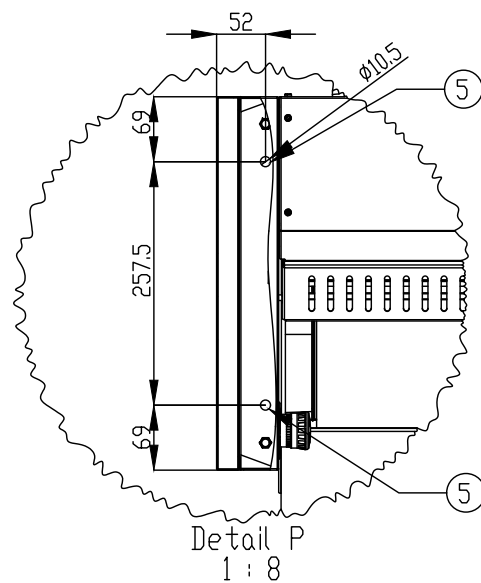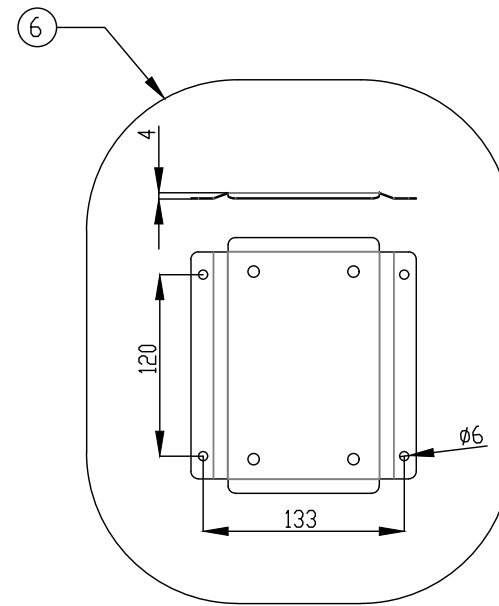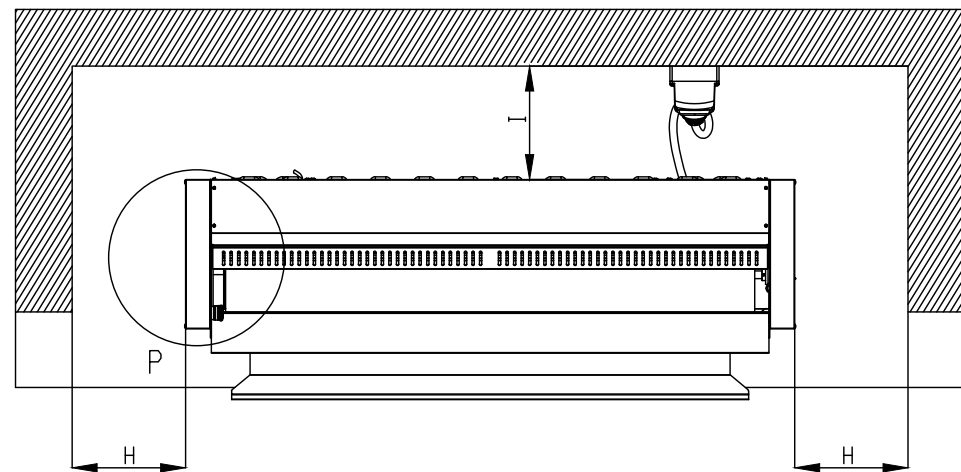

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale: 1: 20 A3	Suun. Design. www.metos.com/	Tarj./tilausno. Inq./order nr.	Pvm. Date 1.8.2024
Nimitys Name Roller ironer GI1218 E VT + TA Roller ironer GI1418 E VT + TA		Proj.no	Piir.no Dwg.no.
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Vers.Ind.	Lehti Page