


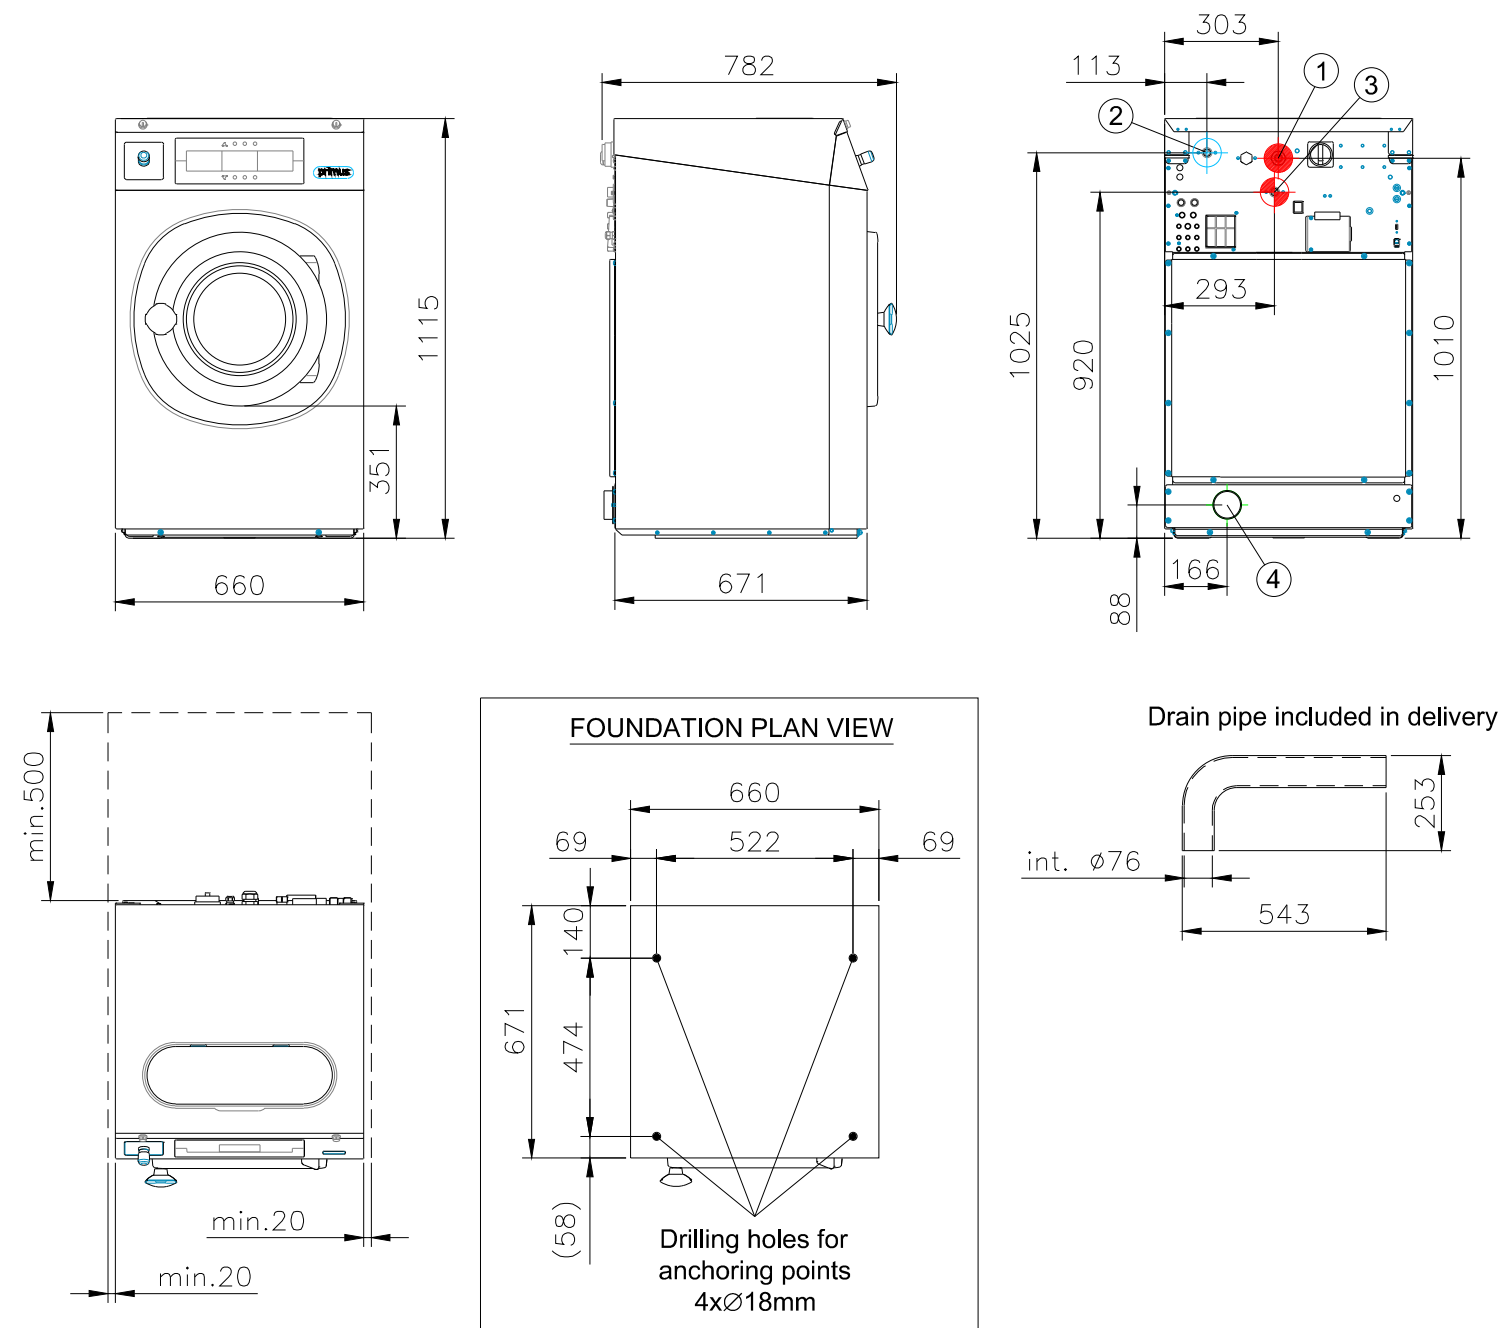


- ① Electric connection: Fixed, cable gland M32, no cable included
- ② Cold soft water connection: 3/4" male, water pressure 300-500 kPa
- ③ Hot water connection: 3/4" male, water pressure 300-500 kPa
- ④ Drain outlet: ext. Ø76 mm, 210 l/min



Code	Electric supply	P/kW	I/A	Fuse/A
4160775MM	3PE AC 440V 60Hz	7,5	9,8	16
4160775MK	3PE AC 400V 50Hz	6,5	9,4	16
4160775MO	3PE AC 480V 60Hz	7,5	9	16

Forces towards the deck through foundation	
Max. static load (with textile and water)	1.9 kN
Max. dynamic load (intermittent vibrations)	1.6 ± 2.4 kN
Frequency of dynamic load	13.7 Hz

Drain pipe included in delivery

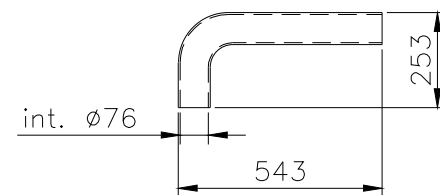


Recommended plinth for the washer extractor
NOTE: Not included in delivery

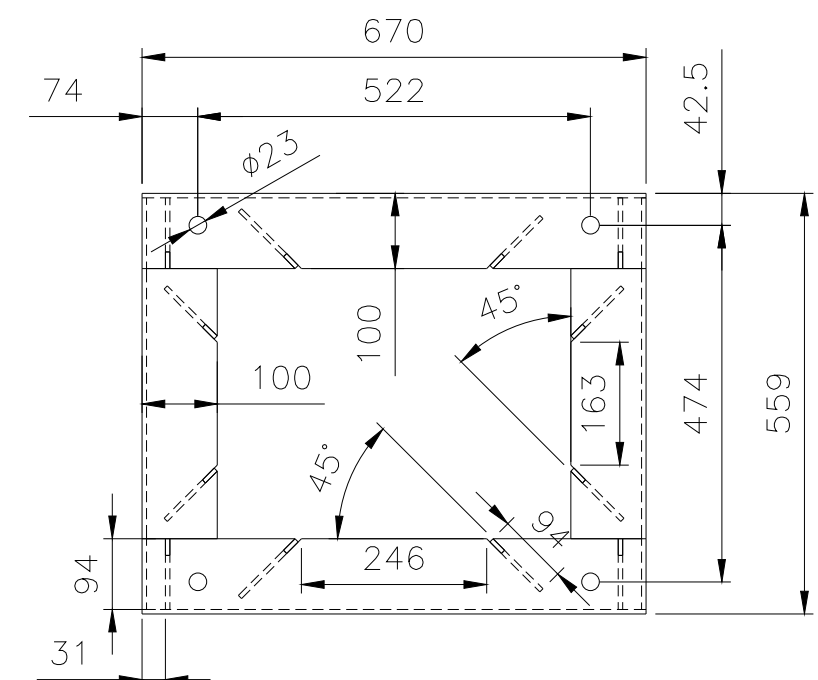

Reinforcement piece to be welded inside the u-profiles, 12pcs.

Plinth material thickness = 6mm
Height 200mm

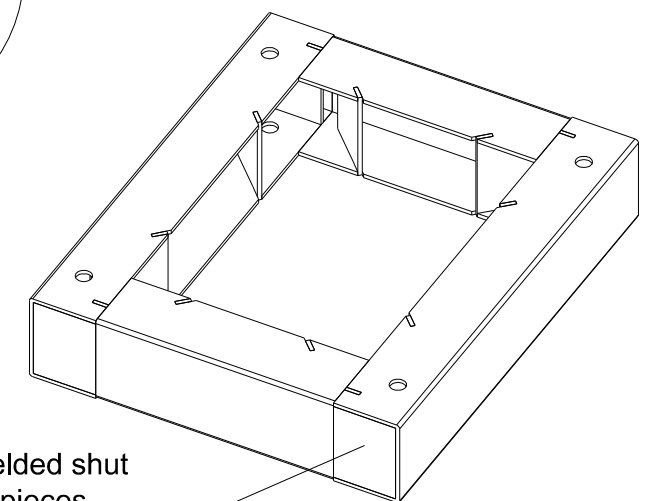

U-profiles are welded shut with 6mm metal pieces

1:10

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale: 1: 20 A3	Suun. Design. www.metos.com/	Tarj./tilausno. Inq./order nr.	Pvm. Date 09.01.2017
Nimitys Name Washer extractor Primus RX80			
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no.
		Vers.Ind.	Lehti Page