


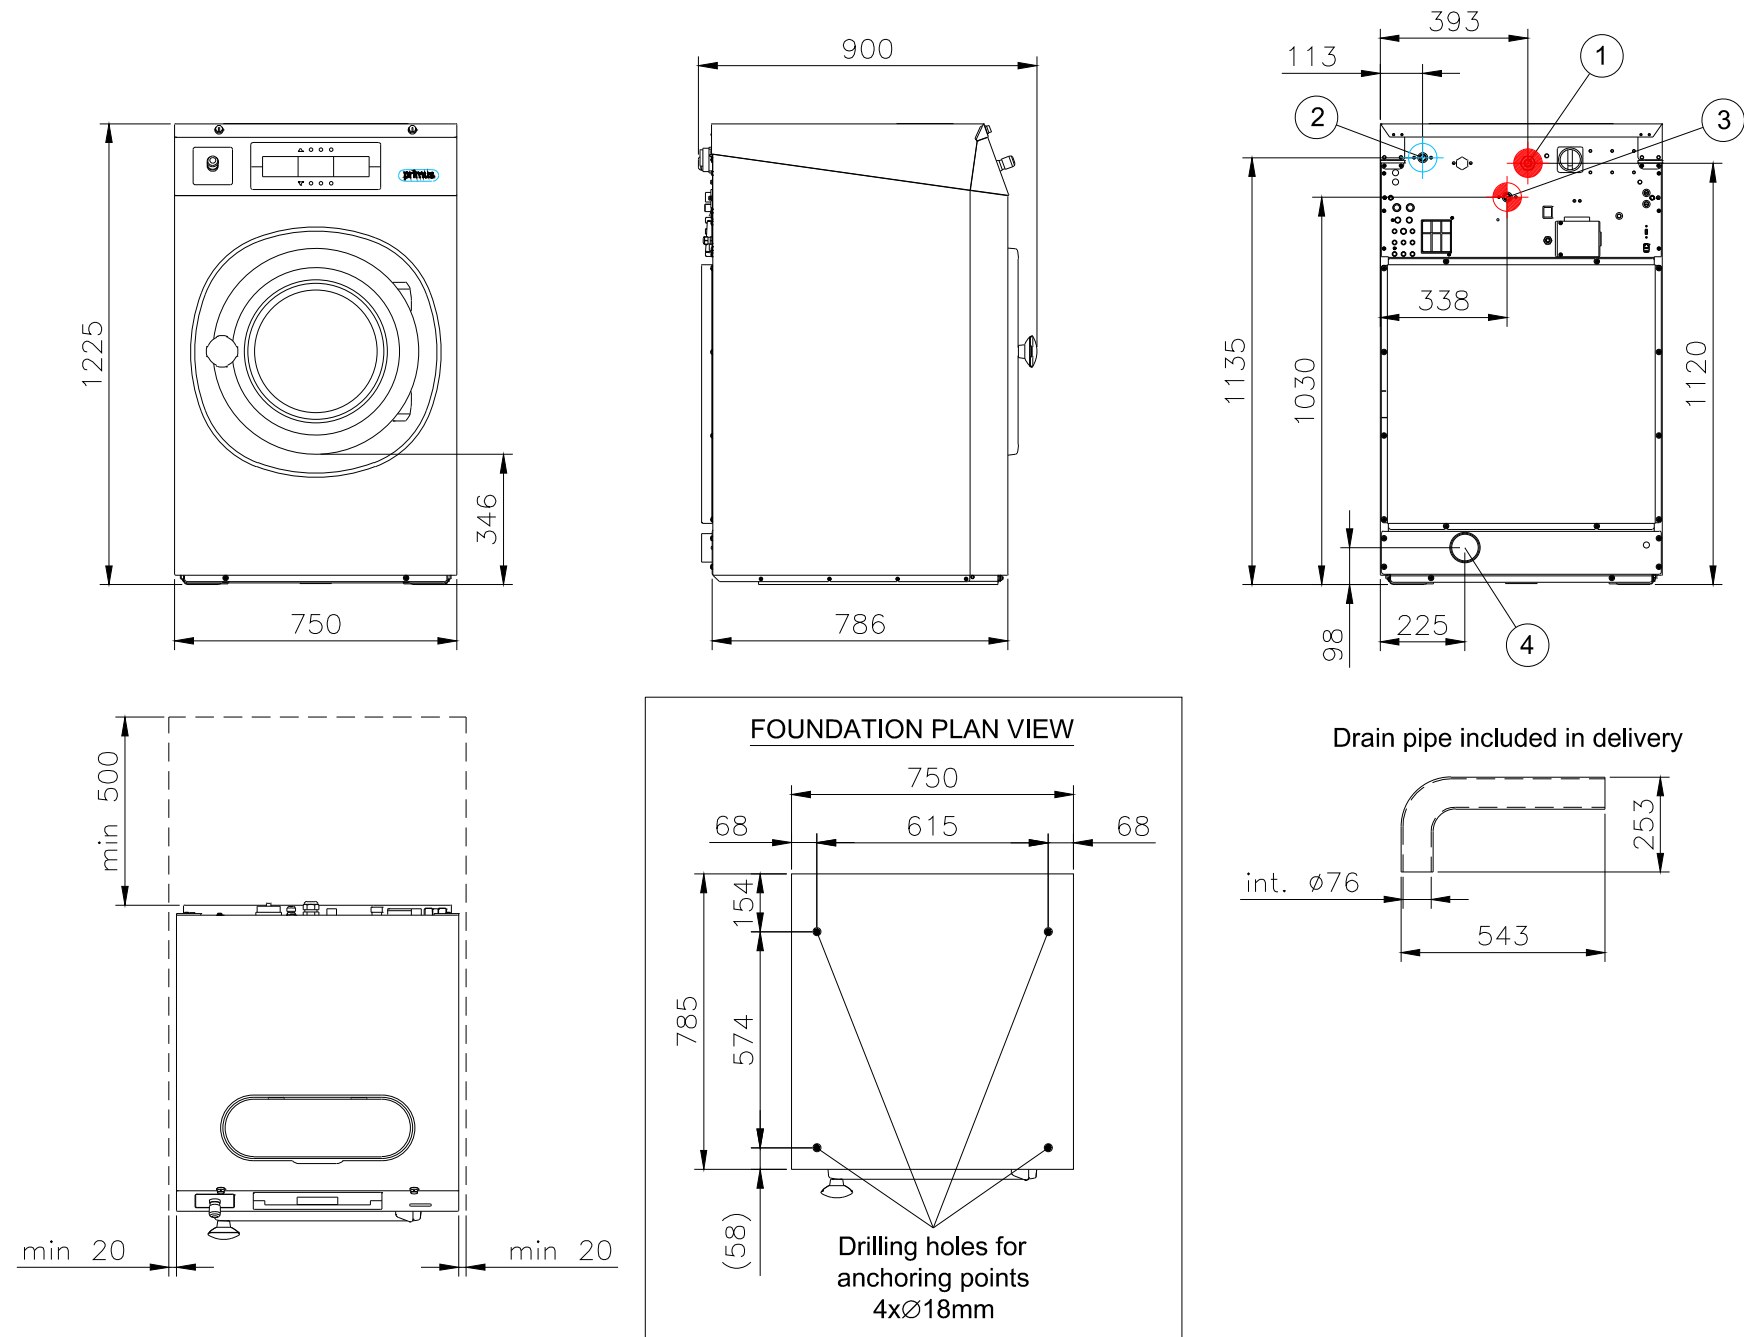


- ① Electric connection: Fixed, cable gland M32, no cable included
- ② Cold water connection: 3/4" male, water pressure 300-500 kPa
- ③ Hot water connection: 3/4" male, water pressure 300-500 kPa
- ④ Drain outlet: ext. Ø76 mm, 210 l/min

Code	Electric supply	P/kW	I/A	Fuse/A
4160785MM	3PE AC 440V 60Hz	9,8	12,9	16
4160785MK	3PE AC 400V 50Hz	9,8	14,1	20
4160785MO	3PE AC 480V 60Hz	9,8	11,8	16

Forces towards the deck through foundation	
Max. static load (with textile and water)	2.7 kN
Max. dynamic load (intermittent vibrations)	2.2 ± 5.1 kN
Frequency of dynamic load	12.7 Hz

Recommended plinth for the washer extractor

NOTE: Not included in delivery

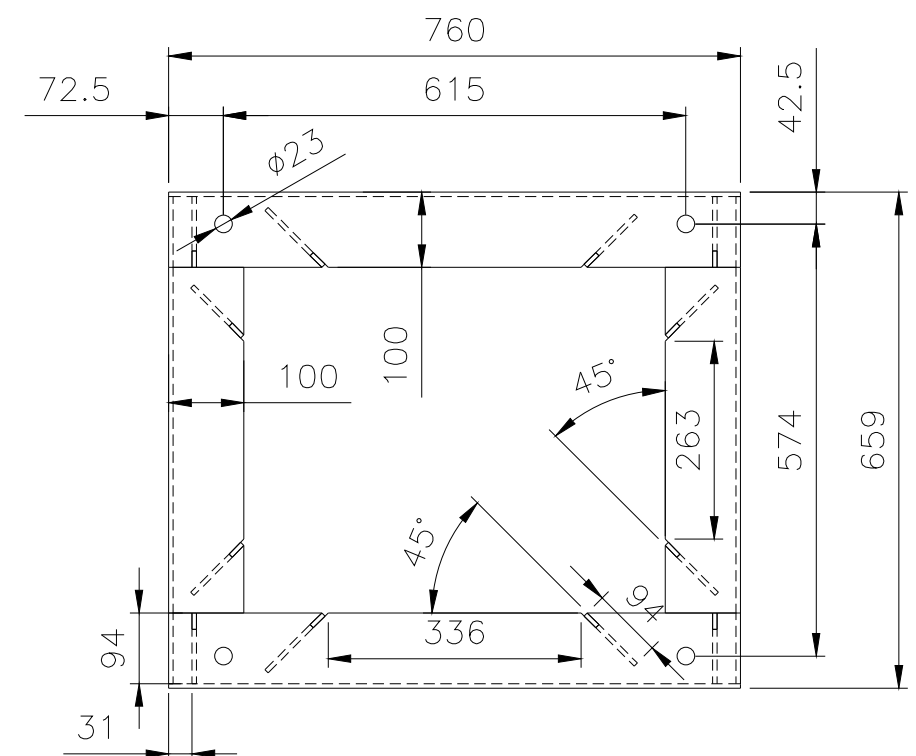

Reinforcement piece to be welded inside the u-profiles, 12pcs.

Plinth material thickness = 6mm
Height 200mm

U-profiles are welded shut with 6mm metal pieces

1:10

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale:	1: 20 A3	Suun. Design.	Tarj./tilausnr. Inq./order nr.
www.metos.com /		Pvm. Date 25.01.2017	
Nimitys Name		Washer extractor Primus RX135	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no.
		Vers.Ind.	Lehti Page