
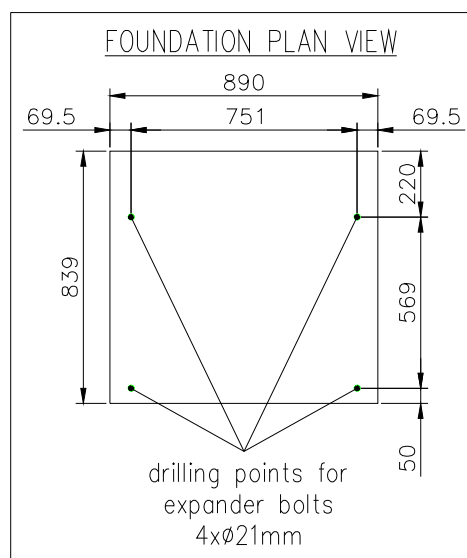
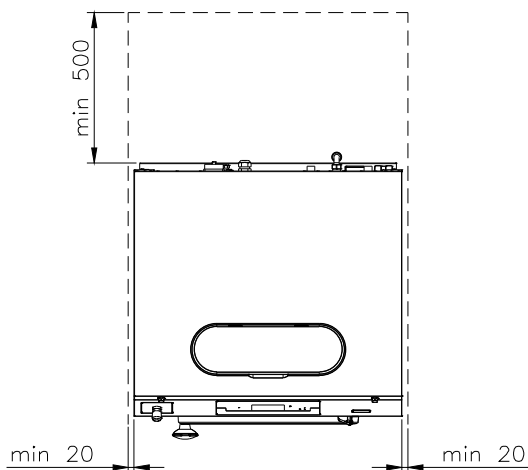
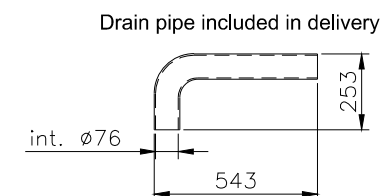
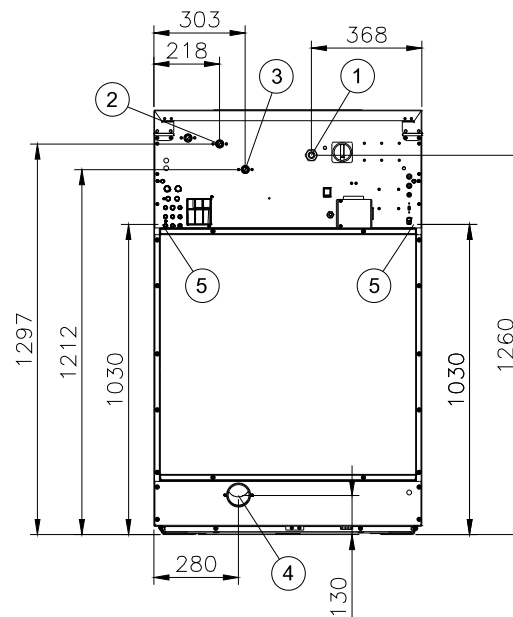
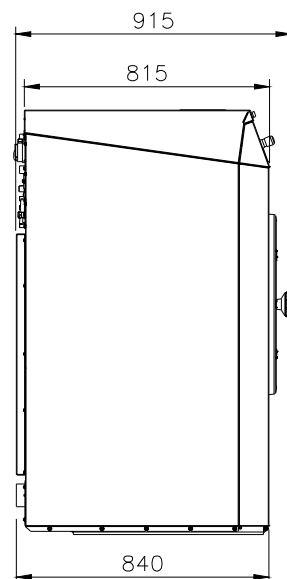


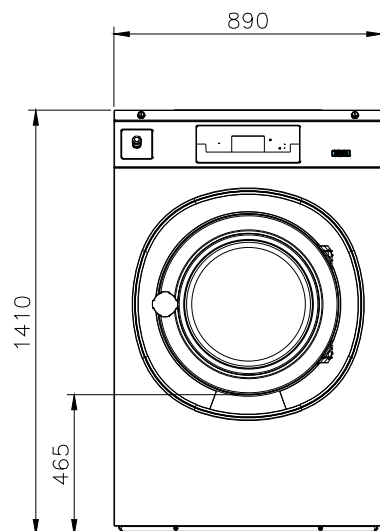

- ① Electric connection: Fixed, cable gland M32, no cable included
- ② Cold water connection: 3/4" male, water pressure 300-500 kPa
- ③ Hot water connection: 3/4" male, water pressure 300-500 kPa
- ④ Drain outlet: ext. Ø76 mm, 210 l/min
- ⑤ Earthing connection, M6x20

Code	Electric supply	P/kW	I/A	Fuse/A
4160790MM	3PE AC 440V 60Hz	12,7	16,7	25
4160790MK	3PE AC 400V 50Hz	12,7	18,3	25
4160790MO	3PE AC 480V 60Hz	12,7	15,3	25

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhteet: Scale:	1: 25 A4	Suun. Design.	Tori./Ilmausno. Inq./order nr.
www.metos.com /		Pvm. Date	05.12.2016
Nimitys Name		Washer extractor Primus RX180	
Proj.no		Piir.no Dwg.no.	Vers.Ind. Lehti Page
Metos Oy Ab FI-04220 KERA Tel: 0204 39 13 Fax: 0204 39 4432			