
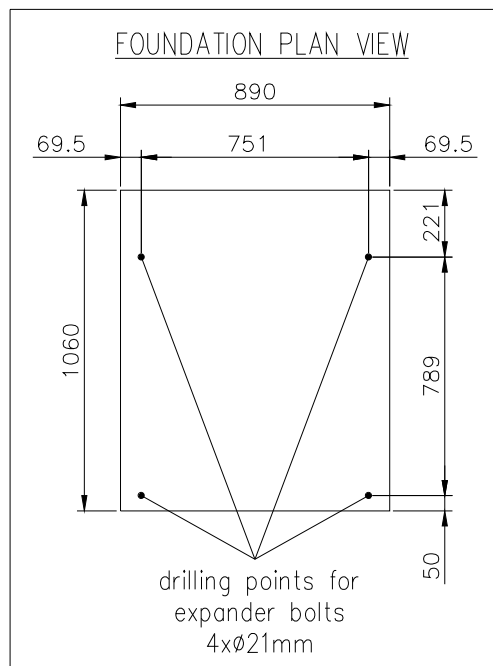
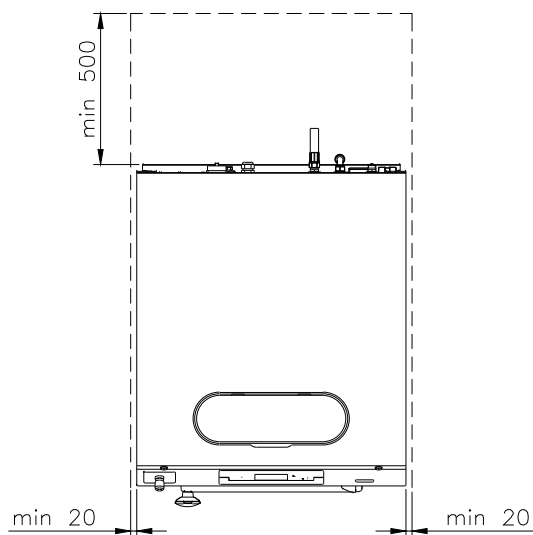
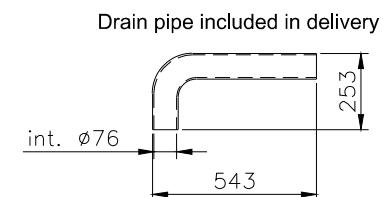
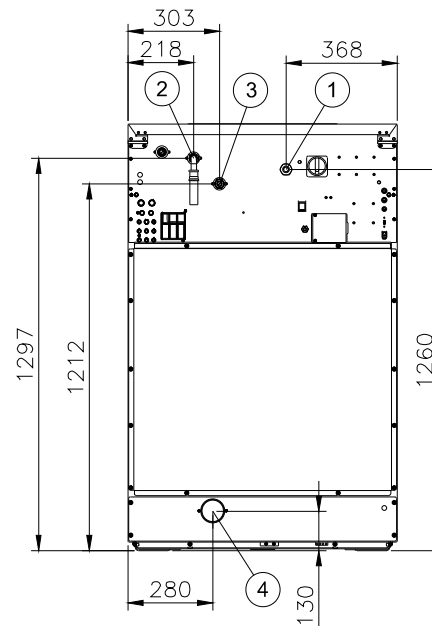
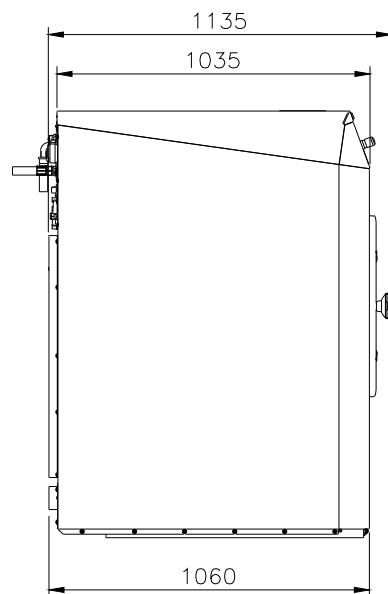


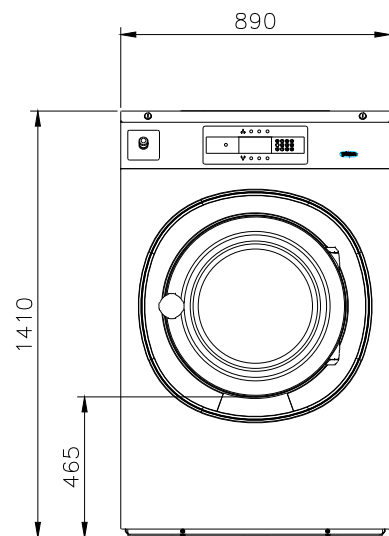

- ① Electric connection: Fixed, cable gland M32, no cable included
- ② Cold water connection: 3/4" male, water pressure 300-500 kPa
- ③ Hot water connection: 3/4" male, water pressure 300-500 kPa
- ④ Drain outlet: ext. Ø76 mm, 210 l/min

Code	Electric supply	P/kW	I/A	Fuse/A
4160800MM	3PE AC 440V 60Hz	23,2	30,4	32
4160800MK	3PE AC 400V 50Hz	23,2	33,5	40
4160800MO	3PE AC 480V 60Hz	23,2	27,9	32

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale: 1: 25 A4	Suun. Design: www.metos.com/	Tarj./tilausnr. Inq./order nr.	Pvm. Date 07.12.2016
Nimitys Name: Washer extractor Primus RX280		Proj.no	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Pii.no Dwg.no.	
		Vers.Ind. Lehti Page	