

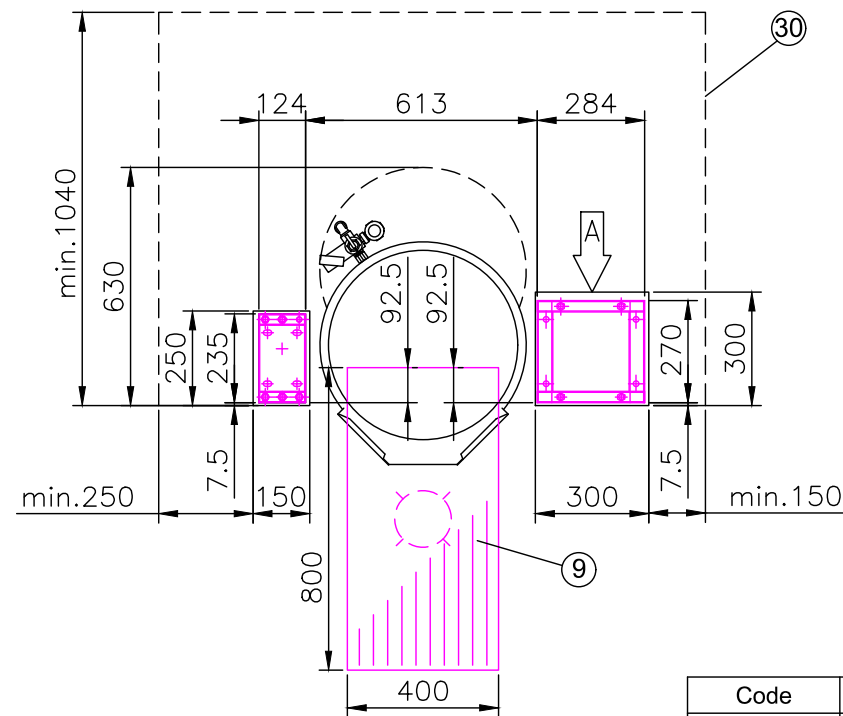
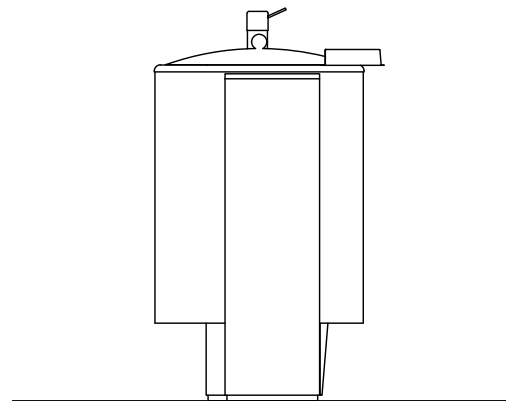


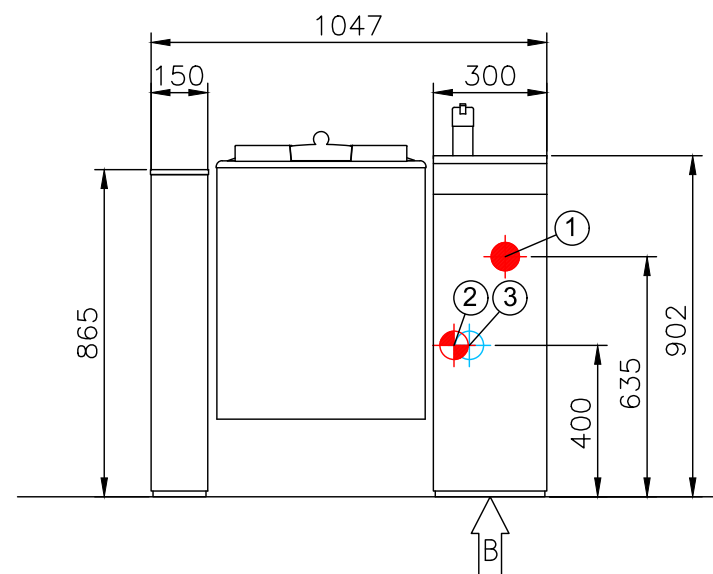


Code	Electric supply	P/kW	Fuse/A
4215363	3PE AC 400V 50Hz	10,5	16
4215370	3PE AC 440V 60Hz	10	16
4215370MO	3PE AC 480V 60Hz	13,1	20


Installation on surface installation frames
(not included in the delivery)

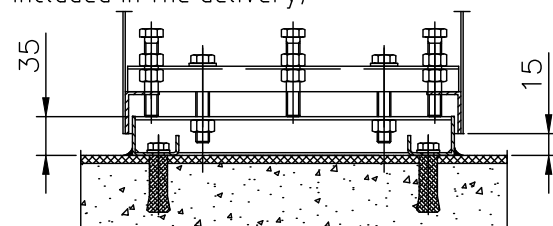


Installation on subsurface frames casted into the floor
(not included in the delivery).

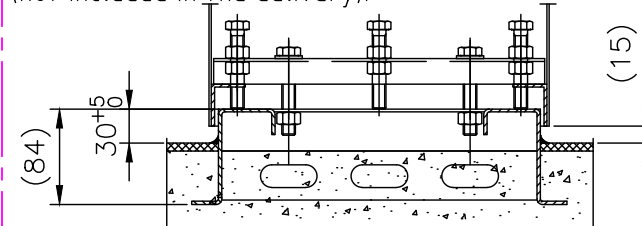


CONNECTION OPTION 1




CONNECTIONS
(LEAD THROUGH)
FROM REAR.

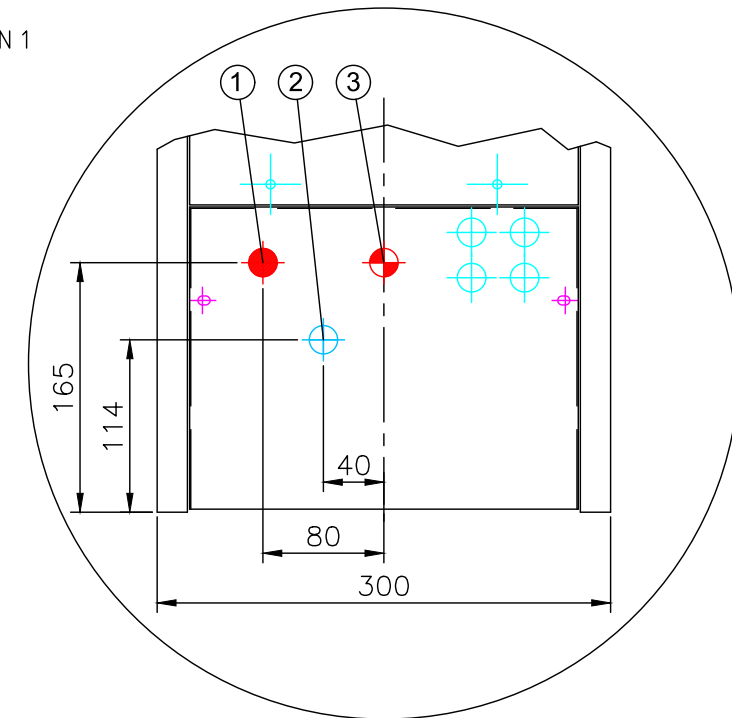

CONNECTION OPTION 2



CONNECTIONS FROM BELOW.

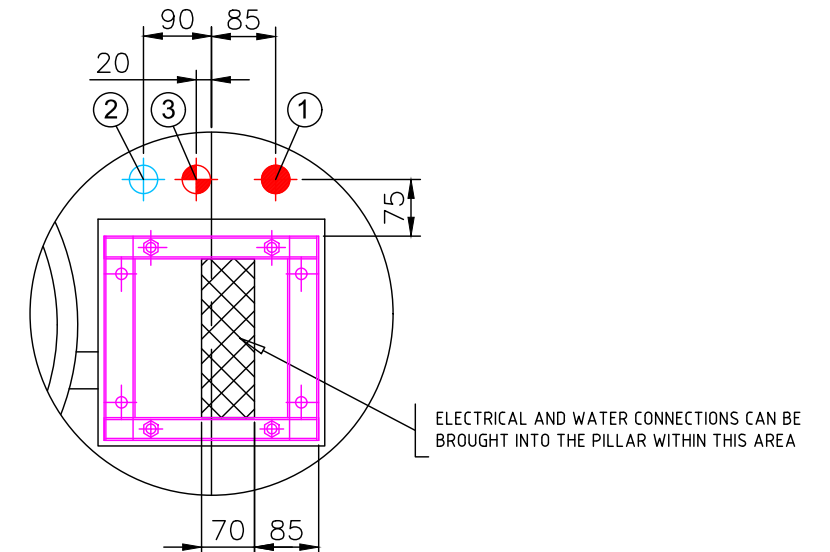

- ① Electrical connection: Fixed, Reserve 1,5m power cable (not in Metos delivery) above floor level
- ② Cold water connection: Ø15mm (G1/2") , One-way and shut off valves (not in Metos delivery) must be fitted
- ③ Hot water connection option for hand shower: (max 60°C) Ø10mm (G3/8") , One-way and shut off valves (not in Metos delivery) must be fitted
- ⑨ Recommended floor drain: (not in Metos delivery)
- ③⑩ Maintenance space

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhte: Scale: 1: 20 A3	Suun. Design. www.metos.com/	Tarj./tilausno. Inq./order nr.	Pvm. Date 27.11.2024
Nimitys Name metos Cooking kettle Metos Viking 60E			
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no Piir.no Dwg.no.	Vers.Ind. Lehti Page