


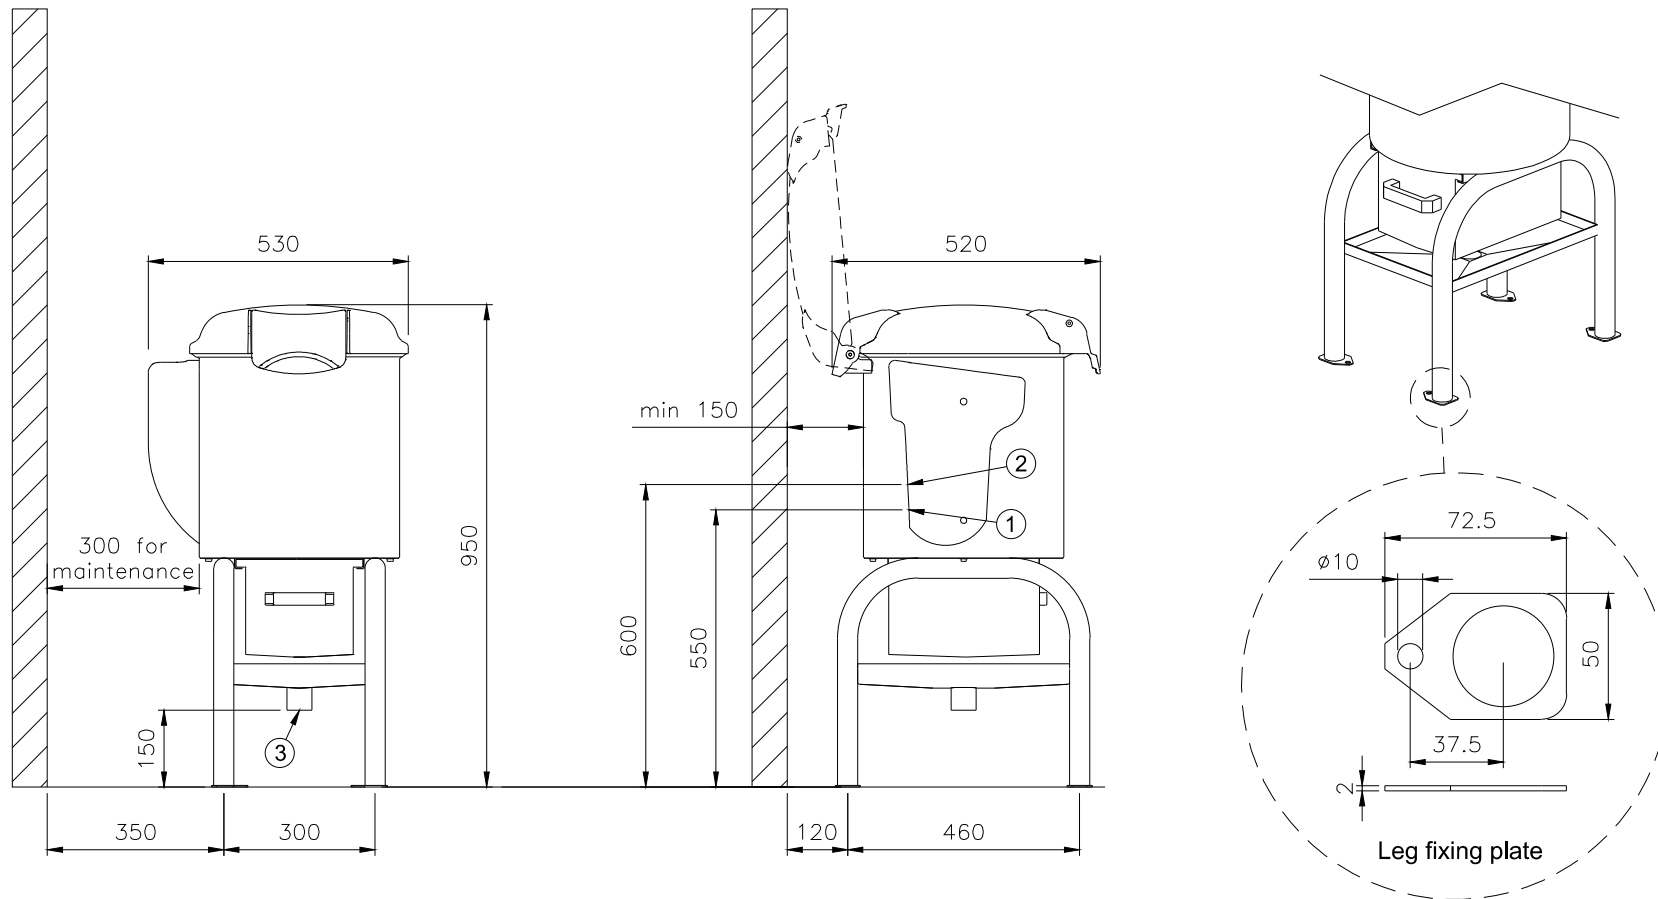

- ① Electrical connection: Semi-fixed, cable gland PG13,5 cable length 1m
- ② Cold water connection: 0,2-10 bar, 3/4" male thread, including 1.5m flexible hose
- ③ Drain: Ø50 mm

Code	Electric supply	P/kW	I/A	Fuse/A
4080160MU	3PE AC 230V 60Hz	0,37	3,95	10
4080160MT	3PE AC 230V 50Hz	0,37	3	10

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhteet: Scale:	1: 15 A4	Suun. Design.	Pvm. Date
www.metos.com /		Tarj./Alkuperä, Ind./order nr.	2.1.2020
Nimitys Name		Peeling machine Metos Alto FP108 5 kg	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no.
		Vers.Ind.	Lehti Page