
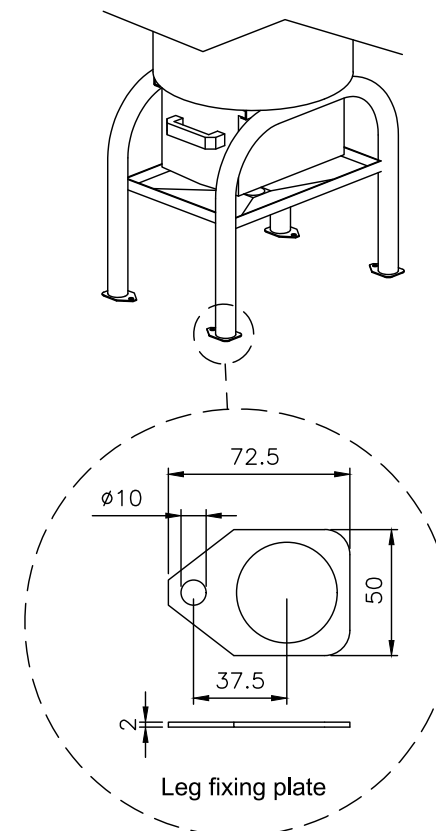


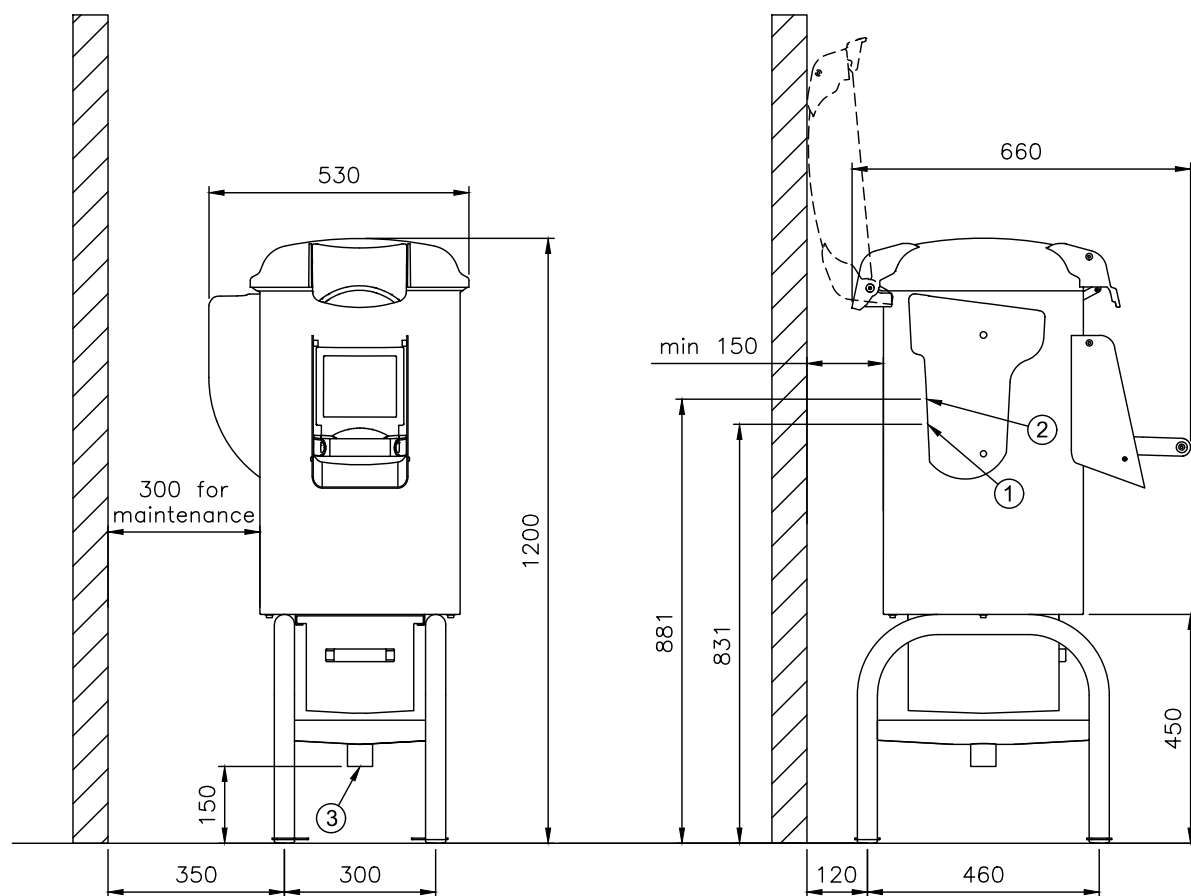

- ① Electrical connection: Semifixed, cable gland PG13,5 cable length 1m
- ② Cold water connection: 0,2-10 bar, 3/4" male thread, including 1.5m flexible hose
- ③ Drain: Ø50 mm

Code	Electric supply	P/kW	Fuse/A
4080164MM	3PE AC 440V 60Hz	0,9	10
4080164MK	3PE AC 400V 50Hz	0,9	10
4080164MO	3PE AC 480V 60Hz	0,9	10
4080164MI	3PE AC 230V 60Hz	0,9	10

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale: 1: 15	Suun. Design. www.metos.com/	Tarj./Alueenno. Inq./order nr.	Pvm. Date 2.1.2020
Nimitys Name metos		Peeling machine Metos Alto FP113 18 kg	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no.
		Vers.Ind.	Lehti Page