
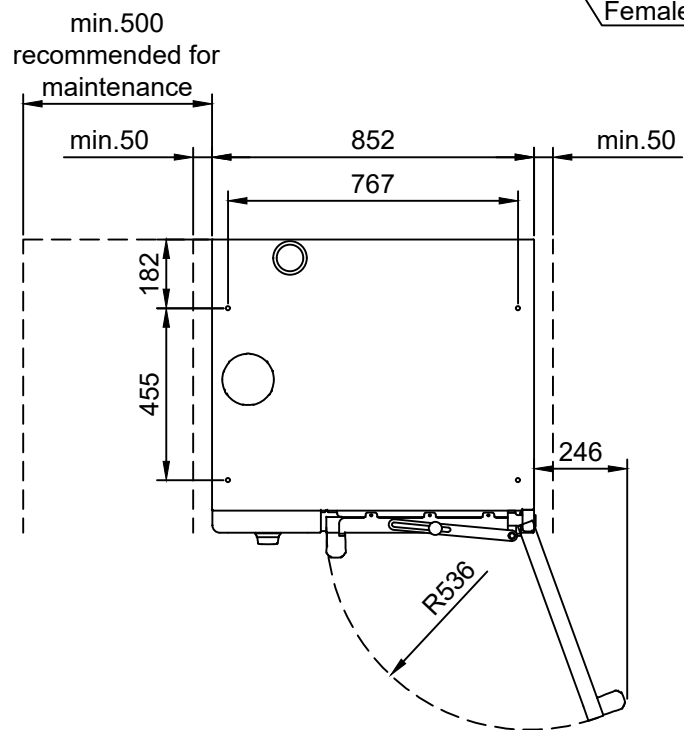
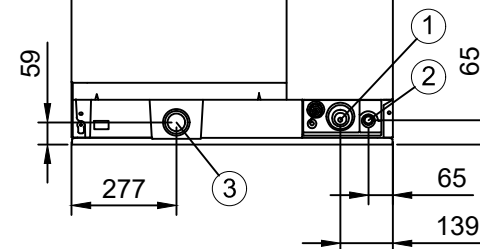
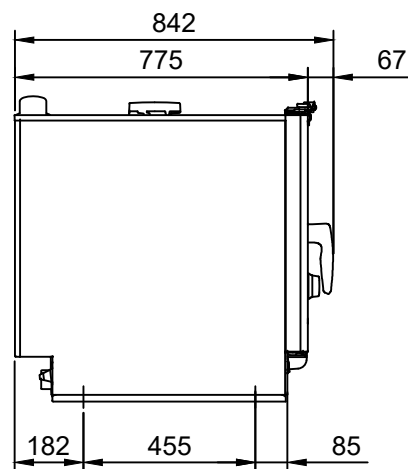


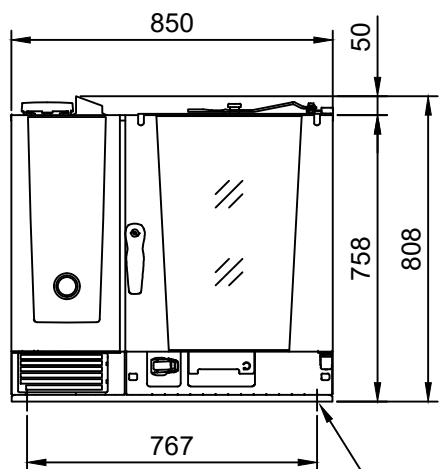

- ① Electrical connection: Semifixed, 2,5 m cable without plug, cable size 4 x 2,5 mm² (230 V 4 x 4 mm²)
- ② Cold water connection: R 3/4" male, pressure 100 - 600 kPa
- ③ Drain connection: DN50 pipe

Code	Electric supply	P/kW	I/A	Fuse/A
4352010MR	3PE AC 230 V 50/60 Hz	10,8	27,1	32
4352010MK	3PE AC 400 V 50/60 Hz	10,8	15,6	16
4352010MM	3PE AC 440 V 50/60 Hz	10,8	14,2	16
4352010MO	3PE AC 480 V 50/60 Hz	10,8	13	16

Vers.	Muutos:	Pvm.	Suun.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suun.	Kaupalliset asiat:	Työmaa-asiat:	
Suhde:	Proj.no	Tarj./lausnro.	Pvm.
1: 20 A4			13.08.2020
		Nimitys Steamer iCombi Pro 6-1/1	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Piir.no Lehti	