
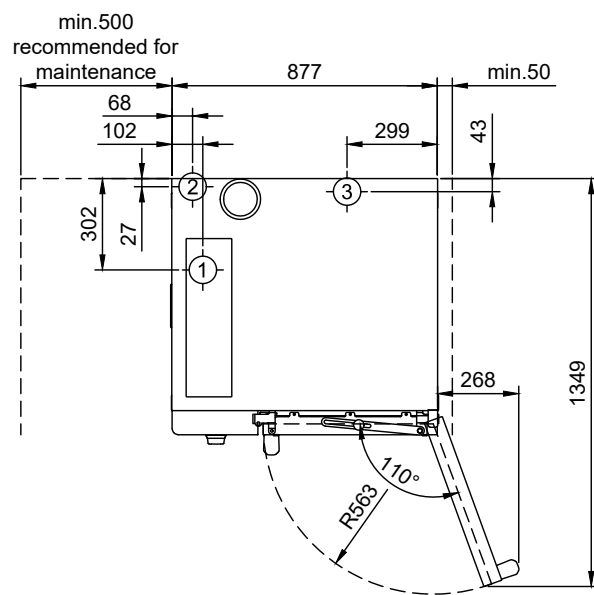
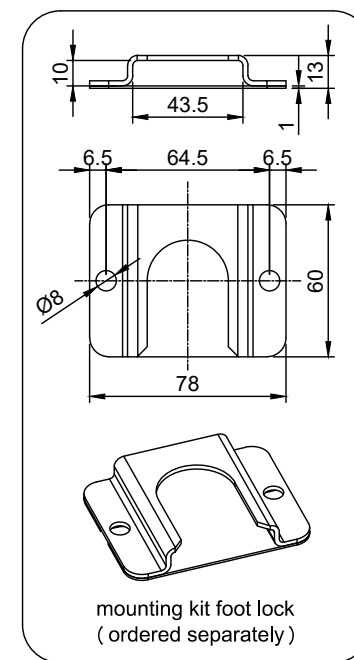
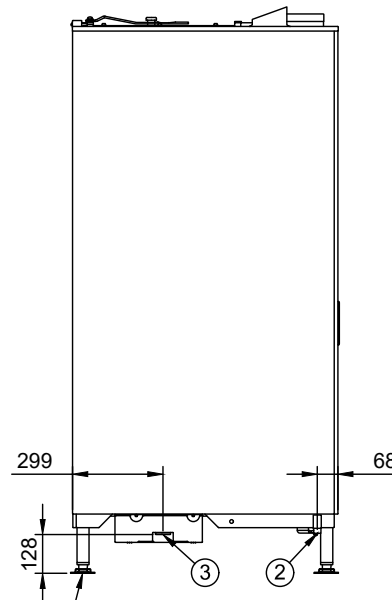
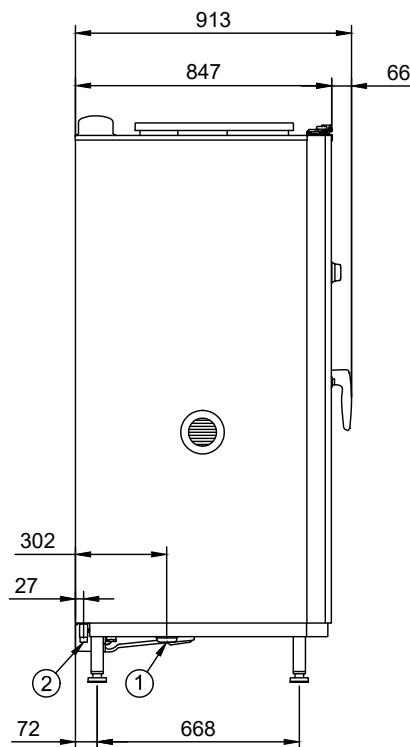


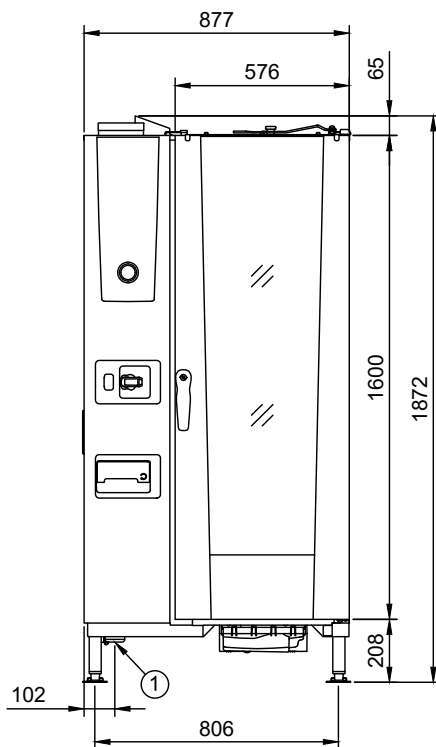

Stainless steel feet (40x40) can be welded directly to the ship floor or fastened using mounting kit

- ① Electrical connection: semifixed, no cable included, recommended cable size 4 x 10 mm², at least of type H07 RN-F
- ② Cold water connection: R 3/4" male, pressure 100 - 600 kPa (recommended 300 kPa)
- ③ Drain connection: DN 50 mm pipe

Code	Electric supply	P/kW	Fuse/A
4352214MM	3PE AC 440V 50/60Hz	37	63
4352214MK	3PE AC 400V 50/60Hz	37	63
4352214MI	3PE AC 230V 50/60Hz	37	100

Vers.	Muutos:	Pvm.	Suun.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suun.	Kaupalliset asiat:	Työmaa-asiat:	
Suhde:	Proj.no	Tarj./lausekno.	Pvm.
1: 25			11.02.2021
Nimitys		Combi steamer Metos iCombi Classic 20-1/1	
metos			
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Piir.no	Lehti