


## Cold Basin Metos Drop-In CB 1600 Nova Plus LED

Cold basin GN 3/1, depth 160 mm. Drop-in model without side panels

- structure of the basin totally seamless and all the corners have been rounded for easier cleaning
- there is an outlet valve on the bottom of the basin with hose length of 1 m
- basin's edge is 15 mm above the furniture's top plate
- width of upper shelf 420 mm
- 3000K LED light
- shelf made of hardened glass
- shelf with PLUS glass edge

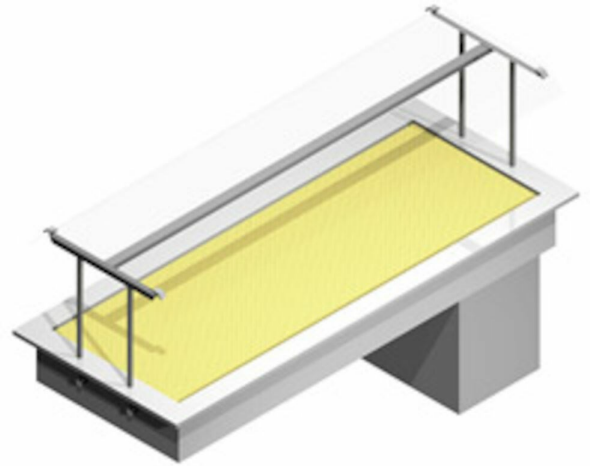

## Cold Basin Metos Drop-In CB 1600 Nova Plus LED

Product capacity	4 GN 1/1
Item width mm	1600
Item depth mm	650
Item height mm	640/1019
Package volume	1.236
Unit of volume	m3
Package volume	1.236 m3
Package length	165
Package width	70
Package height	107
Package unit of dimension	cm
Package dimensions (LxWxH)	165x70x107 cm
Net weight	87
Net weight	87 kg
Gross weight	87
Package weight	87 kg
Unit of weight	kg
Connection power kW	0.33
Fuse Size A	10
Connection voltage V	220-240
Number of phases	1NPE
Frequency Hz	50
Startup current A	2
Protection rating (IP)	43
Type of electrical connection	Plug
Drain diameter	21/16
Type of the refrigerant	R290
Quantity of refrigerant g	110
Remarks (misc.)	drop-in hole 1545x575 mm

# **Cold Basin Metos Drop-In CB 1600 Nova Plus LED**

**metos**

**DROP-IN COLD BASIN**

UPPER SHELF				
NOVA	NOVA PLUS	DROP IN OPENINGS		NET WEIGHT
CODE	CODE			
4138741	4322041	DI-CB 450	409mm x 575mm	46 kg
4138743	4322043	DI-CB 800	745mm x 575mm	58 kg
4138745	4322045	DI-CB 1200	1145mm x 575mm	70 kg
4138747	4322047	DI-CB 1600	1545mm x 575mm	82 kg

The length of the connection cable is 3,2 m.

When constructing the counter, an opening for the connection cable must be considered. The opening must be at least the size of a plug (diameter min. 4.0 mm). In addition, the edges of the opening must be finished to make sure that the connection cable is not damaged by rubbing against the opening edge.

Drain: 22/16 mm  
Unit is fitted with a 1 m drain hose.

The counter, where drop-in units are installed, must be damp-proof and strong enough to bear the appliance weight.

**SERVICE- /VENTILATION DOOR**  
The grid must be larger in size than the condenser area, i.e. >0,09 m<sup>2</sup>. At least 50% of this area must be perforated.

Flow trough air circulation is recommended by fitting similar grid on the other side of the unit.

