




The holes to the table for fastening the faucet and drainage.

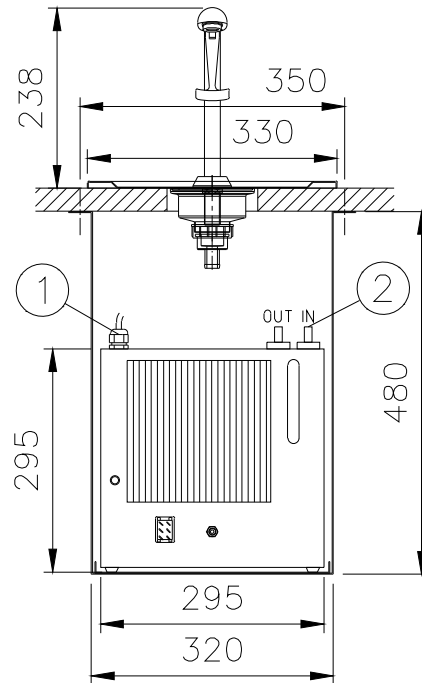

Cooling unit can also be set inside the buffet unit. Make sure of good ventilation.

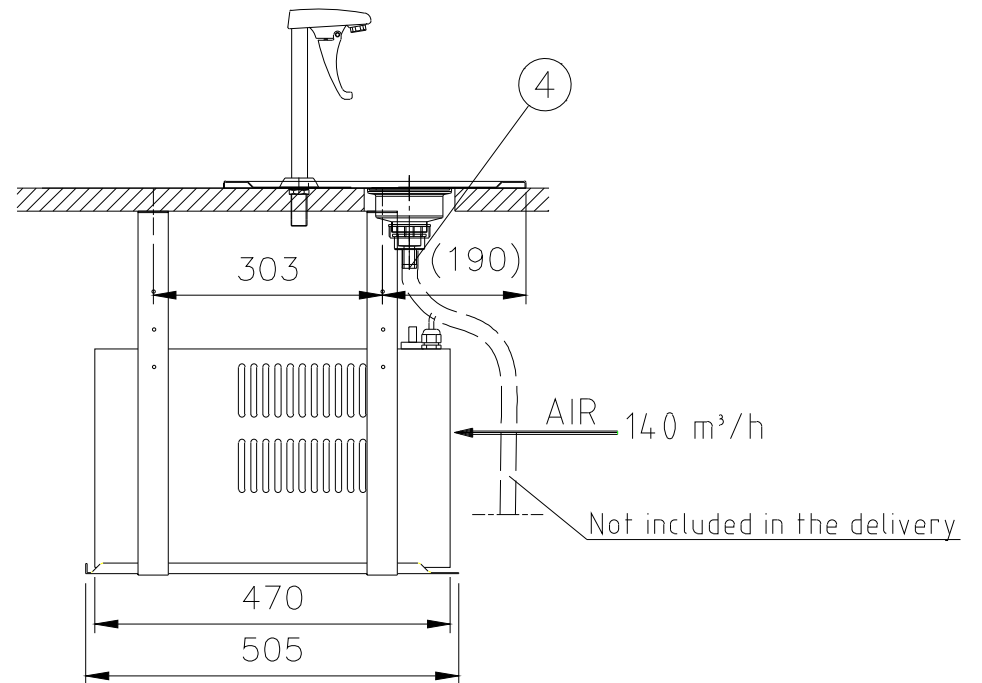

- ① Electric connection, 230V, 1NPE, 50Hz, 0,5kW, 16A
- ② Cold water connection, Cu-pipe \varnothing 10mm, max 500 kPa
- ④ Drain, 25/19 mm

Vers. Ind.	Muutos: Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhde: Scale:	1: 10 A4	Suun. Design. www.metos.com/	Tarj./tilausno. Inq./order nr. Pvm. Date 03.10.2017
		Drop-in water dispenser Metos D-I WD 230V 1NPE 50Hz	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no / i4213325	Piir.no Dwg.no. Vers.ind. Lehti Page