

Plate Dispenser Metos

Drop-In LPDW 1x320

Heated

One heated cylinder, heating effect 0.7kW. Regulation range for temperature is 0 - +90°C

- capacity about 60 plates
- max. diameter of plates 320 mm
- drop-in model without side panels
- drop-in hole size 382mm x 585mm
- unit's edge is 15 mm above the furniture's top plate
- recommended height of furniture 900 mm
- easily adjustable spring power according to weight of the plates
- easy to service cassette model heating unit

Accessories:

- Adjustment rods



Plate Dispenser Metos Drop-In LPDW 1x320 Heated

| | |
|-------------------------------|-----------------|
| Product capacity | appr. 65 plates |
| Item width mm | 400 |
| Item depth mm | 650 |
| Item height mm | 720 |
| Package volume | 0.264 |
| Unit of volume | m3 |
| Package volume | 0.264 m3 |
| Package length | 51 |
| Package width | 70 |
| Package height | 74 |
| Package unit of dimension | cm |
| Package dimensions (LxWxH) | 51x70x74 cm |
| Net weight | 23 |
| Net weight | 23 kg |
| Gross weight | 28 |
| Package weight | 28 kg |
| Unit of weight | kg |
| Connection power kW | 0.7 |
| Fuse Size A | 10 |
| Connection voltage V | 230 |
| Number of phases | 1NPE |
| Frequency Hz | 50/60 |
| Startup current A | 3.1 |
| Protection rating (IP) | 20 |
| Electrical cable length mm | 3200 |
| Type of electrical connection | Plug |



Installation on top of the table


**Drop-in Plate dispenser
Metos D-I LPDW 320 heat**

Electric connection: 230V 1~ 0,7 kW 10A
The length of the connection cable is 3,2 m.

When constructing the counter, an opening for the connection cable must be considered. The opening must be at least the size of a plug (diameter min. 40 mm). In addition, the edges of the opening must be finished to make sure that the connection cable is not damaged by rubbing against the opening edge.

The counter, where drop-in units are installed, must be damp-proof and strong enough to bear the appliance weight.

Net weight:
D-I LPDW 320 40 kg

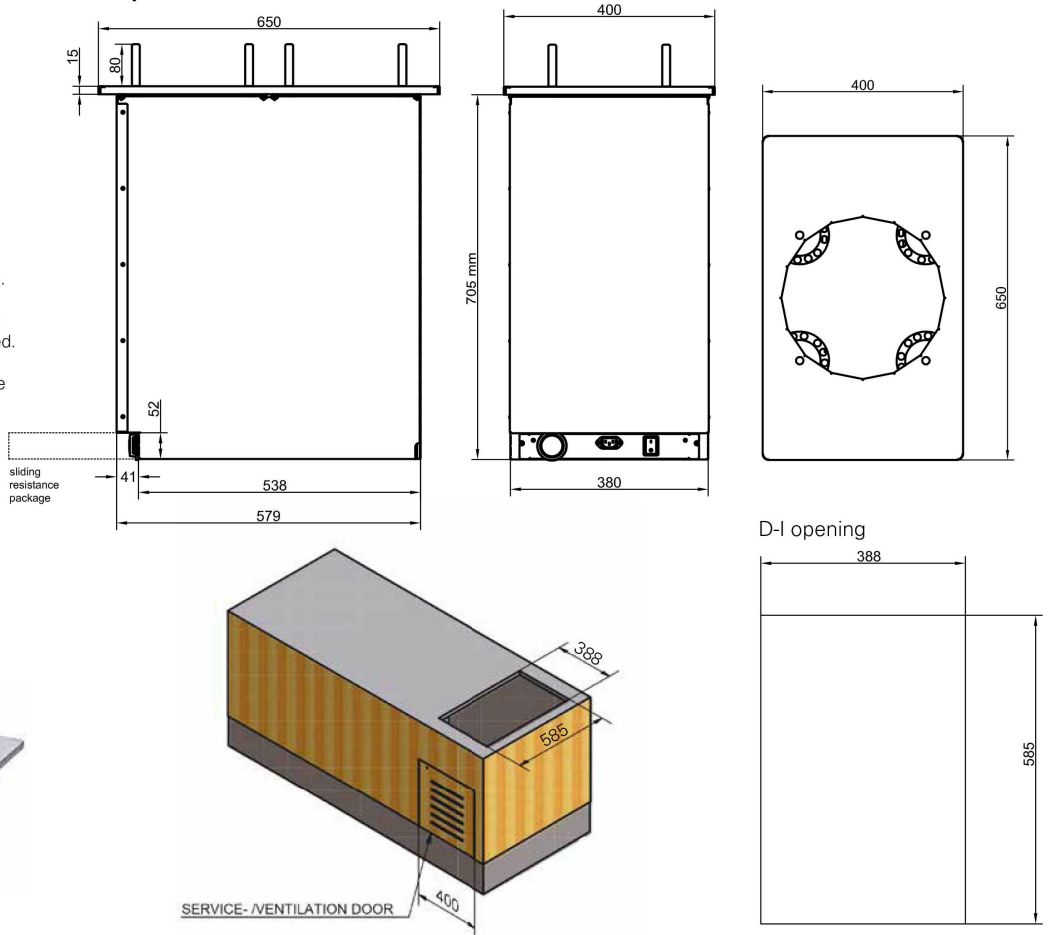

SERVICE- /VENTILATION DOOR