

Bratt pan Metos Futura 85D (pan 790x530x180mm)

The short preheating time and strong electrical tilting makes cooking with Metos Futura 85D bratt pan more ergonomic and effortless.

D = frying zone 790x530x180 mm.

The frying surface is made of thick steel which stores heat extremely well throughout the whole frying area. The volume of the pan area is 75 liters. The 180 mm deep pan also enables stewing and boiling in the pan. The temperature is adjustable between 0...+250°C. The heating time, to the set temperature, lasts for 5-6 minutes. The seamless surfaces and rounded corners make's the pan easy to clean.

Metos Futura 85D bratt pan has a strong electrical tilting, which makes emptying of the pan more ergonomic. Tilting cannot be started if the lid is closed or the water filling (option) is in progress. Manual tilting is available as a factory option. In addition, the bratt pan can be equipped with height adjustment function (factory option) and water filling tap (factory option). The height adjustment and water filling works by pressing a button.

- balanced lid
- stainless steel external surfaces and lid
- uniform stainless steel frying area
- electro mechanical control
- overheating protection

FACTORY OPTIONS (to be ordered together with the bratt pan):

- height adjustment 800-950 mm





Bratt pan Metos Futura 85D (pan 790x530x180mm)

| Product capacity | 75 L, frying surface 790 * 530 |
|-------------------------------|--------------------------------|
| Item width mm | 850 |
| Item depth mm | 806 |
| Item height mm | 954 |
| Package volume | 1.058 |
| Unit of volume | m3 |
| Package volume | 1.058 m3 |
| Package length | 98 |
| Package width | 90 |
| Package height | 120 |
| Package unit of dimension | cm |
| Package dimensions (LxWxH) | 98x90x120 cm |
| Net weight | 170 |
| Net weight | 170 kg |
| Gross weight | 200 |
| Package weight | 200 kg |
| Unit of weight | kg |
| Connection power kW | 10.5 |
| Fuse Size A | 16 |
| Connection voltage V | 400/230 |
| Number of phases | 3NPE |
| Frequency Hz | 50 |
| Startup current A | 15 |
| Protection rating (IP) | X3 |
| Type of electrical connection | Fixed |
| Electrical conn. height mm | 360 |
| Power type | electric |
| Operation type | electromechanical |
| Cleaning | hand wash |
| | |

Bratt pan Metos Futura 85D (pan 790x530x180mm)


| Tilting | electric |
|-------------------|----------|
| Temperature probe | No |
| Oil filtering | No |
| Timer | No |




User Manual SE



METOS FUTURA

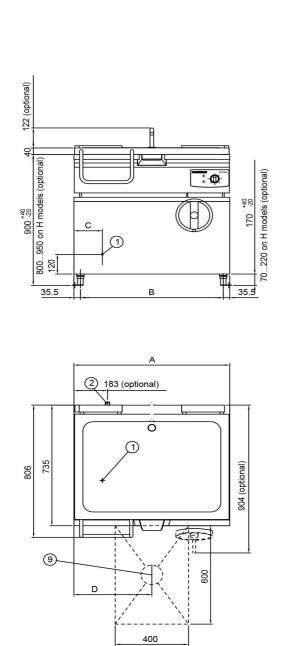

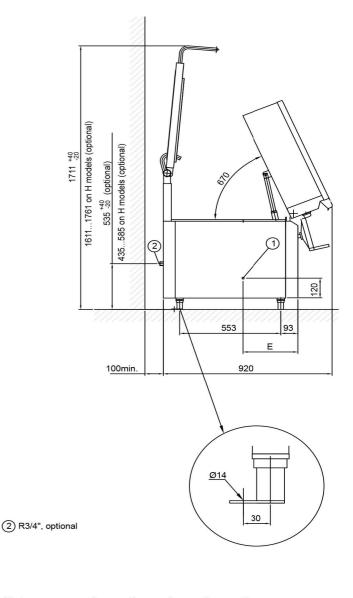

| Metos | Α | В | С | D | Е | |
|------------|------|------|-----|------|-----|--|
| Futura 60 | 600 | 529 | 120 | 300* | 225 | |
| Futura 85 | 850 | 779 | 200 | 425 | 225 | |
| Futura 110 | 1100 | 1029 | 230 | 550 | 225 | |
| * 1.00 | | | | | | |

^{*} manual tilting 200 mm