


Induction range Metos Diamante D74/10TCI table top model, 14

The induction wok table top model Metos Diamante 70 D74/10TCI has four ceramic Ø230 mm size 3,5 kW cooking zones. Cooking zones - in which the temperature can be regulated via control knobs - have been marked on the 6mm thick hob made of unbreakable ceramic glass. An induction range works by only transferring inductive heat from the hob directly to the cooking vessel. Heat does not accumulate within the hob; only the bottom of the pot and the food in the pot or vessel warms up. The hob around the vessels remains cold, which makes using an induction range fast and safe. Cleaning is also easy, since food does not burn onto a cold hob. In addition, the rear of the range is at an incline, which prevents splashes from flowing behind the range.



- four Ø230 mm cooking zones (3.5 kW / cooking zone)
- table model
- large splash proof control knobs
- the exterior and feet are made from stainless steel
- overheating

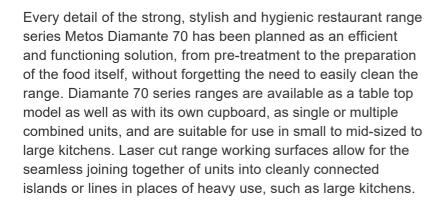

protection

EXTRA ACCESSORIES (can be ordered separately):

- open stand
- stand with guide rails
- cupboard doors;
- cupboard doors for utensil frames;
- utensil frames; knife rack, utensil rack, spice rack frame, spice jar rack;
- drawer for the cupboard;
- cupboard with a heated bottom;
- socket;
- side panels. protection

EXTRA ACCESSORIES (can be ordered separately):

- open stand
- stand with guide rails
- cupboard doors;
- cupboard doors for utensil frames;
- utensil frames; knife rack, utensil rack, spice rack frame, spice jar rack;
- drawer for the cupboard;
- cupboard with a heated bottom;
- socket;
- side panels.



Induction range Metos Diamante D74/10TCI table top model, 14

Item width mm	800
Item depth mm	730
Item height mm	270
Package volume	1.912
Unit of volume	m3
Package volume	1.912 m3
Package length	85
Package width	75
Package height	30
Package unit of dimension	cm
Package dimensions (LxWxH)	85x75x30 cm
Net weight	57
Net weight	57 kg
Gross weight	67
Package weight	67 kg
Unit of weight	kg
Connection power kW	14
Connection voltage V	400
Number of phases	3NPE
Frequency Hz	50/60
Protection rating (IP)	X4
Model	Diamante