


Griddle grooved Metos Diamante D76/10 FTEA1/3R with open cupboard

Open stand electric grill Metos Diamante 70 D76/10 FTEA1/3R has 1/3 grooved and 2/3 smooth, a stainless steel surface. The grill has three cooking zones, the temperature of which can be regulated between 110 °C...280 °C. The control panel has an indicator light, which illuminates when the grill zone is switched on. The grill surface is welded to the exterior of the unit and is recessed by 40 mm, which provides a greater cooking surface and prevents dirt from collecting between the exterior and the surface of the grill. In addition, the grill surface can be inclined 10 mm to the front, which allows grease to flow into the large grease trap.

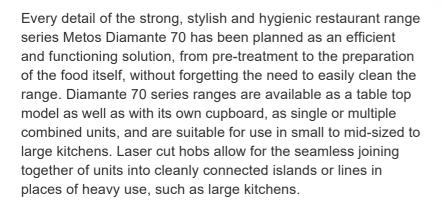

- open cupboard;
- 1/3 grooved, 2/3 smooth;
- stainless steel surface;
- three cooking zones
- large splash proof control knobs;
- exterior and feet are made from stainless steel;
- adjustable height 840...900 mm;
- overheating protection.

EXTRA ACCESSORIES (can be



ordered separately):

- splash guard;
- cupboard doors;
- cupboard doors for utensil frames;
- utensil frames; knife rack, utensil rack, spice rack frame, spice jar rack;
- drawer for the cupboard;
- cupboard guide rails (6 guide rails);
- support for guide rails
- with a heated bottom;
- socket;
- side panels. ordered separately):
- splash guard;
- cupboard doors;
- cupboard doors for utensil frames;
- utensil frames; knife rack, utensil rack, spice rack frame, spice jar rack;
- drawer for the cupboard;
- cupboard guide rails (6 guide rails);
- support for guide rails
- with a heated bottom;
- socket;
- side panels.



Griddle grooved Metos Diamante D76/10 FTEA1/3R with open cupboard

Item width mm	1200
Item depth mm	730
Item height mm	870
Package volume	0.97
Unit of volume	m3
Package volume	0.97 m3
Package length	125
Package width	80
Package height	97
Package unit of dimension	cm
Package dimensions (LxWxH)	125x80x97 cm
Net weight	115
Net weight	115 kg
Gross weight	130
Package weight	130 kg
Unit of weight	kg
Connection power kW	16.2
Connection voltage V	400
Number of phases	3NPE
Frequency Hz	50/60
Protection rating (IP)	X4
Model	Diamante