



EADBS*

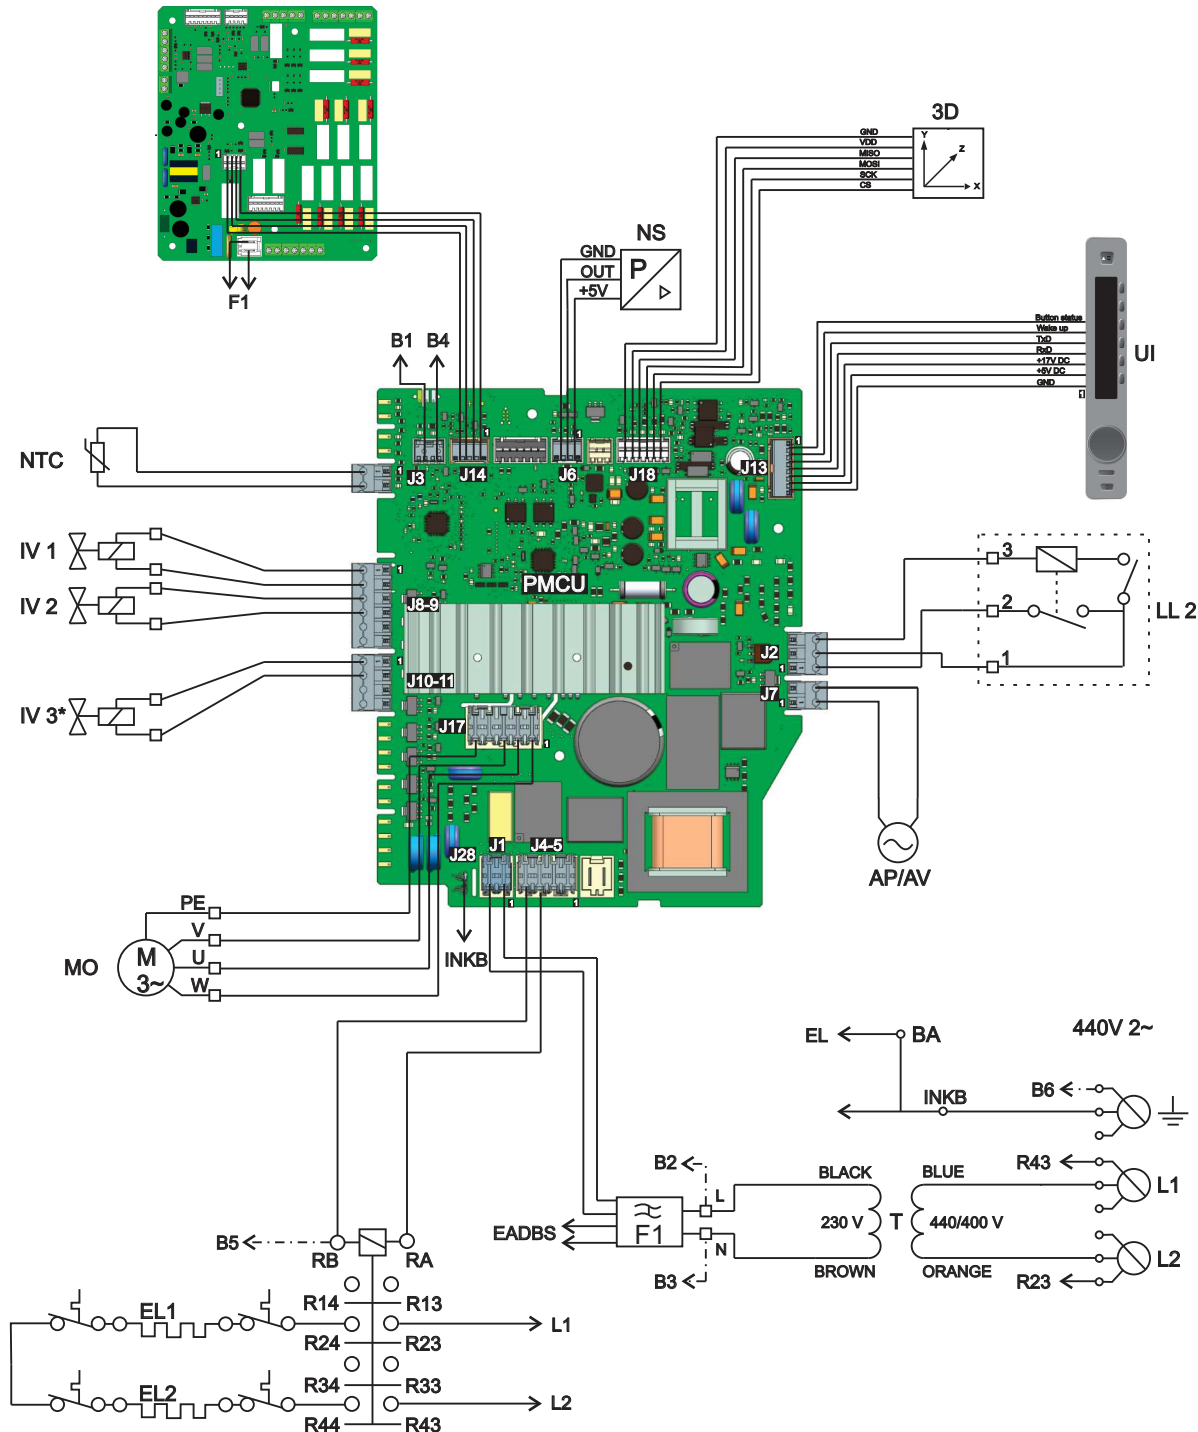


—— WIRES IN ALL MACHINES
 - - - - WIRES IN SOME MACHINES
 - - - - INTERNAL CONNECTION
 * CONNECTED IN SOME MACHINES

F: RADIO INTERFERENCE FILTER
 EL: HEATING ELEMENT
 AP: DRAIN PUMP 50/60 Hz
 AV: DRAIN VALVE
 NTC: THERMISTOR
 IV 1: INLET VALVE 1
 IV 2: INLET VALVE 2
 IV 3: INLET VALVE 3 (HOT)
 MO: MOTOR
 NS: PRESSURE SENSOR
 INKB: INCOMING GROUND
 UI: USER INTERFACE BOARD (AKO TYPE: 777582)
 LL 2: DOOR LOCK EMZ
 PMCU: PROGRAMMABLE MOTOR CONTROL UNIT (AKO TYPE: 777580)
 BA: CONTAINER
 T: TRANSFORMER
 3D: WASH TUB MOVEMENT DETECTION SENSOR
 EADBS: EXTERNAL AUTODOSING BOOKING SYSTEM

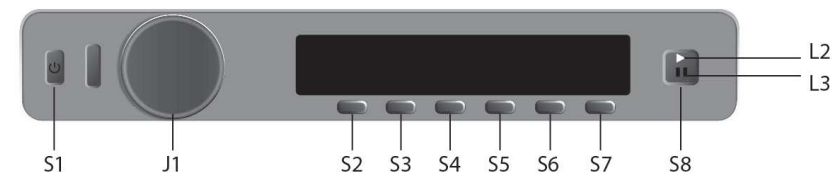

SERVICE MENU:
 TURN OFF POWER (**S1**)
 WAIT FOR AT LEAST 5 SEC
 HOLD **S6** AND **S7** THEN TURN POWER ON (**S1**)
 HOLD **S6** AND **S7** FOR ANOTHER 5 SEC WHEN POWER IS ON

ROTATE DIAL **J1** TO SCROLL THROUGH SERVICE MENU
 PRESS **S3** TO ACCESS MENU STEP
 FOR LEAVING EACH STEP BACK TO MENU, PRESS **S7**
 PRESSING **S3** STORES ALL SELECTIONS MADE AND EXITS SERVICE MENU

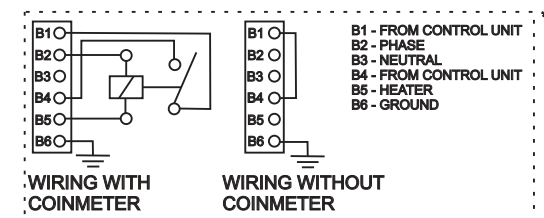

WIRING DIAGRAM WM-75/85.C 440/400V BH

ASKO

This drawing is property of GORENJE Group, and must not, without our consent be copied, handed to other persons or otherwise misused!

123456 - 00